



UNiStrip LP G2

BCP270 G2 12xLED/4000 24V L300 A RU

UNiStrip LP Gen2 is an evolution in both optical and system design. It offers Mono and RGB DMX versions with precision optical performance to enable dynamic effects with affordable pricing.

Product data

General Information	
Light source color	Neutral white
Number of gear units	1 unit
Driver/power unit/transformer	Electronic transformer
Driver included	No
Optical cover/lens type	Polycarbonate linear
Control interface	-
Connection	Flying leads/wires
Cable	Cable 1.0 m without plug
Protection class IEC	Safety class III
Flammability mark	For mounting on normally flammable surfaces
CE mark	-
ENEC mark	-
Warranty period	3 years
Constant light output	No
RoHS mark	RoHS mark
Light source engine type	LED
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Aluminum extruded

Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Aluminum
Mounting device	Mounting bracket adjustable
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	329 mm
Overall width	50 mm
Overall height	61 mm

Approval and Application

Mech. impact protection code	IK03 [0.3 J]
------------------------------	---------------

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	330 lm
Initial LED luminaire efficacy	83 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	70
Initial input power	4 W
Power consumption tolerance	+/-10%

Application Conditions

Ambient temperature range	-40 to +50 °C
---------------------------	---------------


UNlstrip LP G2

Maximum dim level	Not applicable
Product Data	
Full product code	911401855498
Order product name	BCP270 G2 12xLED/4000 24V L300 A RU
Order code	911401855498
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	18
Material Nr. (12NC)	911401855498
Net Weight (Piece)	0.459 kg



Dimensional drawing

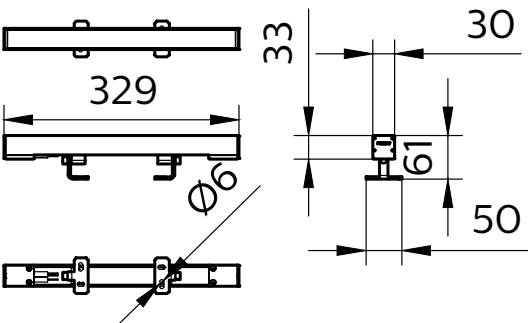

UNlstrip LP G2 BCP270

