



# Harmony 1/2 HID

## CGP660 CDO-TT70W II R200 PC GR-2900 60P

Harmony 1, 1, MASTER CityWhite CDO-TT, 70 W, 88 W,  
Electronic, iReflect reflector version 200, Polycarbonate bowl/  
cover, Pole-mounting bracket diameter 60 mm

Harmony is based on a clean shape and a modular construction. It can be adapted to all styles of setting and types of application. Available in two sizes and designed for heights from 4 to 10 meters, the luminaire can be combined with several brackets and wall-mounted solutions, allowing you to compose varied, yet consistent installations. Harmony is the overall lighting solution for classic and contemporary urban settings, integrating the most advanced technologies in the field of photometric and mechanical engineering, as well as in respect of sustainability, safety and maintenance.

### Product data

General Information		Light Technical	
Lamp family code	CDO-TT [MASTER CityWhite CDO-TT]	Upward light output ratio	0.03
Light source replaceable	Yes	Luminous Flux	6,300 lm
Number of gear units	1 unit	Standard tilt angle posttop	0°
Gear	EB [Electronic]	Standard tilt angle side entry	0°
Driver included	Yes	Correlated Color Temperature (Nom)	2800 K
Product family code	CGP660 [Harmony 1]	Luminous Efficacy (rated) (Nom)	72 lm/W
CE mark	Yes	Number of light sources	1
Warranty period	3 years	Light source color	White
Flammability mark	-	Optical cover type	Polycarbonate bowl/cover
ENEC mark	-	Luminaire light beam spread	360°
EU RoHS compliant	Yes	Optic type outdoor	iReflect reflector version 200

## Harmony 1/2 HID

### Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	28 A
Inrush time	0.24 ms
Power Consumption	70 88 W
Power Factor (Fraction)	0.97
Connection	Plug-in connector 3-pole Wieland/Adels compatible
Cable	-
Number of products on MCB of 16 A type B 11	

### Temperature

Ambient temperature range	-20 to +35 °C
---------------------------	---------------

### Controls and Dimming

Dimmable	No
Driver/power unit/transformer	-
Control interface	-
Constant light output	No

### Mechanical and Housing

Housing Material	Aluminum
Reflector material	Polycarbonate
Optic material	Aluminum
Optical cover material	Glass
Fixation material	Aluminum
Housing Color	Grey
Mounting device	Pole-mounting bracket diameter 60 mm
Optical cover shape	Flat
Optical cover finish	Clear
Overall length	685 mm
Overall width	536 mm
Overall height	298 mm

Overall diameter	536 mm
Effective projected area	0.024 m²
Dimensions (Height x Width x Depth)	298 x 536 x 685 mm

### Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [20 J vandal-resistant]
Surge Protection (Common/Differential)	Philips standard surge protection level
Protection class IEC	Safety class II

### Initial Performance (IEC Compliant)

Power consumption tolerance	+/-10%
-----------------------------	--------

### Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	5 %
-------------------------------	-----


### Application Conditions

Maximum dim level	Not applicable
-------------------	----------------

### Product Data

Order product name	CGP660 CDO-TT70W II R200 PC GR-2900 60P
Full product name	CGP660 CDO-TT70W II R200 PC GR-2900 60P
Full product code	871869908996200
Order code	912300023485
Material Nr. (12NC)	912300023485
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699089962
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699089962

## Dimensional drawing

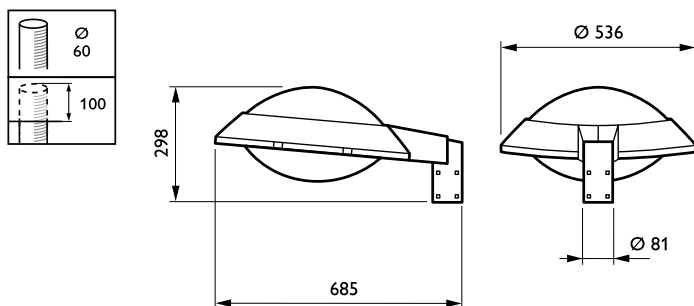

## Harmony 1/2 HID

