



Stela+ gen2 Round

BPP611 24x /NW PSU II WRN AL GR SRG10 76

STELA-ROUND AREA GEN2, LED XP-G2, LED, Neutral white, Power supply unit (On/Off), 220 to 240 V, 50 to 60 Hz, Safety class I, Wide road optic for S-class, Polymethyl methacrylate bowl/cover, Grey, Luminaire surge protection level until 10 kV differential mode and 10 kV common mode, Post-top for diameter 76 mm

Stela Round is at the forefront of LED technology in street lighting. The REVOLED cooling and light distribution concept enables tremendous energy savings and a corresponding reduction in CO2 emissions, whilst meeting current lighting standards. Excellent thermal management of the LEDs ensures a very long lifetime, eliminating the need for lamp replacement and resulting in a very attractive Total Cost of Ownership. The introduction of the latest-generation LED and programmable drivers and the possibility of employing Constant Light Output (CLO) in gen2 enable a further reduction in power consumption.

Product data

General Information			
Lamp family code	XP-G2 [LED XP-G2]	Flammability mark	-
Light source replaceable	No	ENEC mark	-
Number of gear units	1 unit	EU RoHS compliant	Yes
Driver included	Yes	Light Technical	
Light source engine type	LED	Upward light output ratio	0
Product family code	BPP611 [STELA-ROUND AREA GEN2]	Luminous Flux	3,200 lumen
Lighting Technology	LED	Standard tilt angle posttop	0°
CE mark	Yes	Standard tilt angle side entry	-
Warranty period	5 years	Correlated Color Temperature (Nom)	4000 K

Stela+ gen2 Round

Luminous Efficacy (rated) (Nom)	110 lm/W
Color rendering index (CRI)	≥70
Light source color	Neutral white
Optical cover type	Polymethyl methacrylate bowl/cover
Luminaire light beam spread	154° x 118°
Optic type outdoor	Wide road optic for S-class

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	65 A
Inrush time	100 ms
Power Consumption	29 W
Power Factor (Fraction)	0.9
Connection	Screw connection with plug and socket
Cable	-
Number of products on MCB of 16 A type B 1	

Temperature

Ambient temperature range	-20 to +35 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Acrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Aluminum
Housing Color	Grey
Mounting device	Post-top for diameter 76 mm
Optical cover shape	Curved

Optical cover finish	Clear
Overall height	195 mm
Overall diameter	600 mm
Effective projected area	0.065 m²

Approval and Application

Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [20 J vandal-resistant]
Surge Protection (Common/Differential)	Luminaire surge protection level until 10 kV differential mode and 10 kV common mode
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-7%
Initial chromaticity	(0.380, 0.380) SDCM <7
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2


Over Time Performance (IEC Compliant)

Driver failure rate at 5000 h	0.5 %
-------------------------------	-------

Product Data

Full product code	871794323705000
Order product name	BPP611 24x /NW PSU II WRN AL GR SRG10 76
Order code	912300026476
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912300026476
Full product name	BPP611 24x /NW PSU II WRN AL GR SRG10 76
EAN/UPC - Case	8717943237050
EAN/UPC - Product/Case	8717943237050

Dimensional drawing

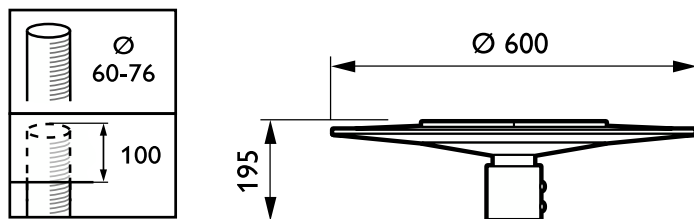

Stela+ gen2 Round

