



eW Reach Powercore gen2

DCP773 5500 100-277V UL CE

5500 K - 5° - 100 to 277 V

eW Reach Powercore gen2 high-performance LED luminaires are premium exterior long-throw dynamic high-quality white luminaires for lighting tall buildings, bridges, and iconic structures. eW Reach Powercore gen2 outputs washes of white light in color temperatures ranging from a warm 2700 K to a cool 6500 K. A full range of accessories allow for customizable beam angles for floodlighting, spotlighting, wall washing, and grazing, along with the efficiency and cost-effectiveness of Powercore technology in a rugged die-cast aluminium housing.

Product data

General Information	
Lamp family code	LED-HB [LED High Brightness]
Light source replaceable	No
Driver included	Yes
Luminaire light beam spread	5°
Protection class IEC	Safety class I
Type description	-
CE mark	CE mark
UL mark	UL mark
Lifetime to 70% luminous flux	70000 h
Operating and Electrical	
Input Voltage	100 to 277 V
Input Frequency	50 to 60 Hz

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Housing Material	Aluminum
Optic material	Glass
Approval and Application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Initial Performance (IEC Compliant)	
Init. Corr. Color Temperature	5500 K
Initial input power	250 W

eW Reach Powercore gen2

Application Conditions

Ambient temperature range -40 to +50 °C

Product Data

Full product code 871829162939900

Order product name DCP773 5500 100-277V UL CE

EAN/UPC - Product 8718291629399

Order code 912400130214


Numerator - Quantity Per Pack 1

Numerator - Packs per outer box 1

Material Nr. (12NC) 912400130214

Net Weight (Piece) 34.000 kg

Dimensional drawing

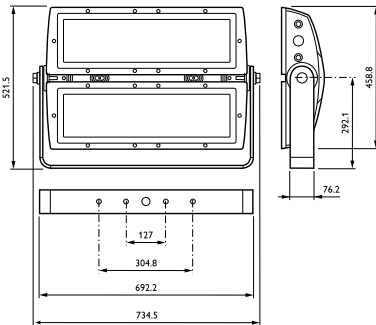

Reach

