

Flex Micro, eW

FCC mark	FCC Class A
Initial performance (IEC compliant)	
Init. Corr. Color Temperature	4000 K
Initial input power	25 W
Over time performance (IEC compliant)	
Lumen Maintenance 70% at 25°C Calculated	100000
Lumen Maintenance 70% at 25°C Reported	60000
Lumen Maintenance 70% at 50°C Calculated	100000
Lumen Maintenance 70% at 50°C Reported	60000
Lumen Maintenance 80% at 25°C Calculated	90000
Lumen Maintenance 80% at 25°C Reported	60000
Lumen Maintenance 80% at 50°C Calculated	61000
Lumen Maintenance 80% at 50°C Reported	60000
Lumen Maintenance 90% at 25°C Calculated	38000
Lumen Maintenance 90% at 25°C Reported	38000
Lumen Maintenance 90% at 50°C Calculated	27000
Lumen Maintenance 90% at 50°C Reported	27000

Application conditions


Ambient temperature range	-30 to +50 °C
---------------------------	---------------

Product data

Full product code	871829163927599
Order product name	BGC482 50 4000K TSDM12 WH
EAN/UPC - Product	8718291639275
Order code	500-000011-30
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	912400130474
Net Weight (Piece)	0.992 kg
Catalog Number	500-000011-30
Catalog Number Description	eW Flex Micro, 4000 K, Translucent Dome Lens, White Housing, 12 in On-Center Node Spacing

IP66 IK09

Dimensional drawing

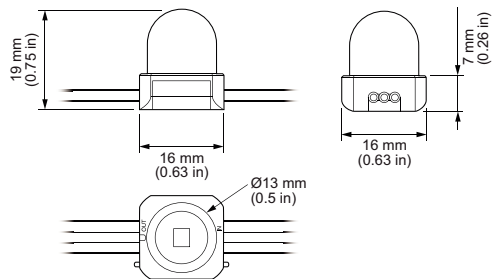

BGC482 50 4000K TSDM12 WH

