



eW Graze MX Powercore

eW Graze MX Powercore, 3000 K, 9° x 9° Beam Angle, 914 mm (3 ft)

eW Graze MX Powercore, 3000 K, 9° x 9° Beam Angle, 914 mm (3 ft)

Many architectural structures need a linear fixture capable of illuminating multiple storeys with minimal setback. Property owners/end users need a controllable product capable of dynamic illumination to draw attention to their establishments and emphasise their brands. Graze MX Powercore is capable of illuminating over 20 meters at very close setback distances. Powercore technology enables simple installation and long product run lengths.

Product data

General information	
Lamp family code	LED-HB [LED High Brightness]
Light source colour	White
Light source replaceable	No
Luminaire light beam spread	9° x 9°
Protection class IEC	Safety class I
CE mark	CE mark
UL mark	UL and cUL mark
Operating and electrical	
Input Voltage	100 to 277 V
Input frequency	50 to 60 Hz


Mechanical and housing	
Housing material	Extruded aluminium
Optical cover/lens material	Polycarbonate
Length	914 mm
Approval and application	
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Vibration standard	Not compliant to ANSI C136.31, 3G. Special
	orders are available to conform to the standard.
	Please contact your Color Kinetics Lighting
	Sales rep for custom configurations.
FCC mark	FCC Class A
Vibration rating	Not compliant to ANSI C136.31, 3G. Special
	orders are available to conform to the standard.

eW Graze MX Powercore

	Please contact your Color Kinetics Lighting	Product
	Sales rep for custom configurations.	Full produ
		Order pro
Initial performance (IEC compliant)		EAN/UPC
Init. Corr. Colour Temperature	3000 K	Order coo
Initial input power	45 W	SAP num
		Numerato
Over time performance (IEC compliant)		SAP mate
Lumen Maintenance 50% at 25 °C	60000	Net Weig
Reported		Commerc
Lumen Maintenance 50% at 50 °C	60000	Catalogue
Reported		
Lumen Maintenance 70% at 25 °C	60000	
Reported		
Lumen Maintenance 70% at 50 °C	60000	IP 66 (⊥)
Reported		
		_
Application conditions		_
Ambient temperature range	-20 to +50 °C	_

Product data	
Full product code	871829139579900
Order product name	BCS419 9-3000 L914
EAN/UPC – product	8718291395799
Order code	523-000080-70
SAP numerator - quantity per pack	1
Numerator – packs per outer box	1
SAP material	912400135123
Net Weight (Piece)	3.800 kg
Commercial Code	523-000080-70
Catalogue number description	eW Graze MX Powercore, 3000 K, 9° x 9° Beam
	Angle, 914 mm (3 ft)

Dimensional drawing

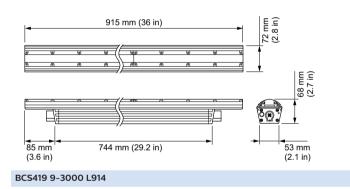



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. All trademarks are owned by Signify Holding or their respective owners.

www.lighting.philips.com 2023, January 10 - data subject to change