



eW Graze QLX Powercore

eW Graze QLX Powercore, 3000 K, 10° x 60° Beam Angle, 1219 mm (4 ft)

eW Graze QLX Powercore, 3000 K, 10° x 60° Beam Angle, 1219 mm (4 ft)

Many architectural structures need a linear fixture capable of illuminating several storeys with minimal setback and reduced power consumption. Property owners/end users need a controllable product capable of dynamic illumination to draw attention to their establishments and emphasise their brands. Graze QLX Powercore is capable of illuminating over 10 metres at very close setback distances. Powercore technology enables simple installation and long product run lengths.

Product data

General information		Input frequency	
Lamp family code	LED-HB [LED High Brightness]	Input frequency	50 to 60 Hz
Light source colour	White	Controls and dimming	
Light source replaceable	No	Dimmable	Yes
Driver included	Yes	Mechanical and housing	
Optical cover/lens type	PCC [Polycarbonate bowl/cover clear]	Housing material	Extruded aluminium
Luminaire light beam spread	10° x 60°	Optical cover/lens material	Polycarbonate
Protection class IEC	Safety class I	Length	1219 mm
CE mark	CE mark	Colour	Aluminium
UL mark	UL and cUL mark	Approval and application	
Operating and electrical		Ingress protection code	IP66 [Dust penetration-protected, jet-proof]
Input Voltage	100 to 277 V		

eW Graze QLX Powercore

Mech. impact protection code	IK10 [20 J vandal-resistant]
Vibration standard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
FCC mark	FCC Class A
Vibration rating	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.

Initial performance (IEC compliant)

Init. Corr. Colour Temperature	2700 K
Initial input power	15 W

Over time performance (IEC compliant)

Lumen Maintenance 50% at 25 °C	60000
Reported	
Lumen Maintenance 50% at 50 °C	60000
Reported	
Lumen Maintenance 70% at 25 °C	60000
Reported	

Lumen Maintenance 70% at 50 °C	60000
Reported	

Application conditions


Ambient temperature range	-40 to +50 °C
----------------------------------	---------------

Product data

Full product code	871869921032800
Order product name	BCS427 10x60-3000 L1219
EAN/UPC – product	8718699210328
Order code	523-000081-76
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	912400135262
Net Weight (Piece)	4.700 kg
Commercial Code	523-000081-76
Catalogue number description	eW Graze QLX Powercore, 3000 K, 10° x 60° Beam Angle, 1219 mm (4 ft)



Dimensional drawing

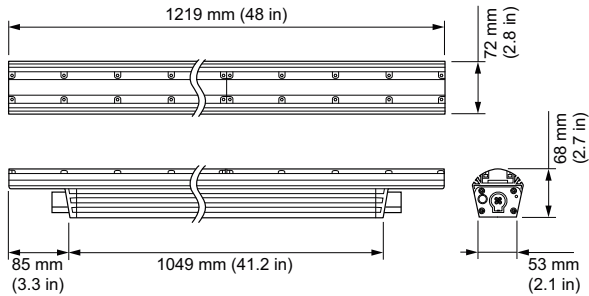

BCS427 10x60-3000 L1219

