



# ColorGraz Intell Hue Powercore



ColorGraz Intell Hue Powercore, 100 to 277 VAC, 30° x 60°, 1219 mm (4 ft)

ColorGraz Intell Hue Powercore, 100 to 277 VAC, 30° x 60°, 1219 mm (4 ft)

Graz is a high-performance, exterior linear luminaire designed to highlight architectural features ranging from surface textures and molding details to archways and windows. Graz Intell Hue utilizes Color Kinetics Intell Hue technology to produce millions of saturated colors, pastels, and high quality white light, in the same precisely controllable luminaire. Multiple luminaire lengths, and beam angles support a large range of façade or surface illumination applications. Low-profile housing, connectorized cabling, a universal power input range, and direct line voltage operation make Graz luminaires easy to install and operate.

## Product data


General information	
Lamp family code	LED-HB [ LED High Brightness]
Light source color	Intell Hue
Light source replaceable	No
Driver included	Yes
Optical cover/lens type	Polycarbonate bowl/cover UV-resistant
CE mark	CE mark
UL mark	UL and cUL mark
Light technical	
Efficacy (lm/W) @ 4000 K	45.1 lm/W

Efficacy (lm/W) @ 2700 K	47.1 lm/W
CRI @ 4000 K	80.7
CRI @ 2700	86.8
Operating and electrical	
Input Voltage	100 to 277 V
Input Frequency	50 to 60 Hz
Controls and dimming	
Dimmable	Yes

ColorGraz e IntelliHue Powercore

Mechanical and housing	
Housing Material	Aluminum extruded
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Length	1219 mm
Color	Aluminum
Approval and application	
Ingress protection code	IP66 [ Dust penetration-protected, jet-proof]
Energy Efficiency Class	G
Mech. impact protection code	IK10 [ 20 J vandal-resistant]
Vibration Standard	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
Corrosion Resistance	Complies with ASTM B117 standard with special order. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
FCC mark	FCC Class A
Vibration Rating	Not compliant to ANSI C136.31, 3G. Special orders are available to conform to the standard. Please contact your Color Kinetics Lighting Sales rep for custom configurations.
EPREL Registration Number	887754
Initial performance (IEC compliant)	
Initial luminous flux (system flux)	2788 lm
Initial luminous flux at color temperature of 2700 K	1760 lm
Initial luminous flux at color temperature of 4000 K	2132 lm
Initial LED luminaire efficacy	38.9 lm/W
Init. Color Rendering Index	60

Dimensional drawing

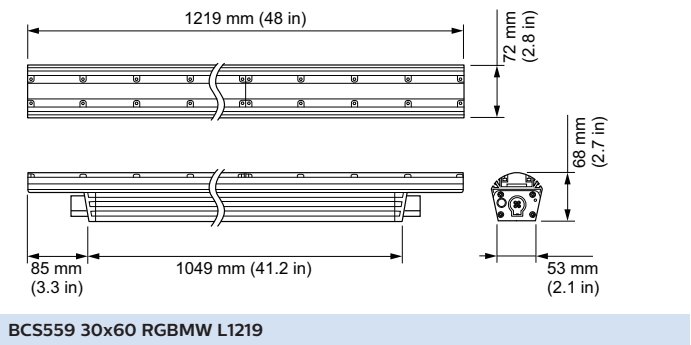

Initial input power	72 W
Over time performance (IEC compliant)	
Lumen Maintenance 50% at 25°C	75000
Reported	
Lumen Maintenance 50% at 50°C	70000
Reported	
Lumen Maintenance 70% at 25°C	100000
Calculated	
Lumen Maintenance 70% at 25°C	70000
Reported	
Lumen Maintenance 70% at 50°C	100000
Calculated	
Lumen Maintenance 70% at 50°C	65000
Reported	
Application conditions	
Ambient temperature range	-40 to +50 °C
Product data	
Full product code	871869921273500
Order product name	BCS559 30x60 RGBMW L1219
EAN/UPC - Product	8718699212735
Order code	423-000016-18
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912400135893
Net Weight (Piece)	4.700 kg
Catalog Number	423-000016-18
Catalog Number Description	ColorGraz e IntelliHue Powercore, 100 to 277 VAC, 30° x 60°, 1219 mm (4 ft)



