PHILIPS Lighting



Vaya Linear LP G2

BCP422 G2 120 3000 L610 UL

LED High Brightness

Vaya Linear LP is a super slim outdoor linear luminaire for low-level grazing applications, with wide 120° beam or elliptical 28° x 84° optics. Its slim form factor is ideal for space-restricted applications with limited setback or allowable install height. The robust Vaya Linear LP G2 offers a variety of color and white CCT options with either static on/off- or dynamic control options via standard DMX-512. The discreet design with integrated power supply and waterproof connectors makes wiring simple, fast and reliable.

Product data

General Information	
Lamp family code	LED-HB [LED High Brightness]
Light source color	Neutral white
Light source replaceable	No
Driver included	Yes
Optical cover/lens type	GT [Tempered glass]
Luminaire light beam spread	120°
CE mark	-
UL mark	UL and cUL mark
CQC mark	-
PSE mark	No
FCC mark	FCC Class A
Operating and Electrical	
Input Voltage	100 to 240 V
Input Frequency	50 to 60 Hz

Aluminum extruded

Optic material	Glass	
Optical cover/lens material	Tempered glass	
Optical cover/lens shape	Flat	
Optical cover/lens finish	Clear	
Approval and Application		
Ingress protection code	IP66 [Dust penetration-protected, jet-proof]	
Mech. impact protection code	IK07 [2 J reinforced]	
Initial Performance (IEC Compliant)		
Initial luminous flux (system flux)	740 lm	
Initial LED luminaire efficacy	84.3 lm/W	
Init. Corr. Color Temperature	3000 K	
Init. Color Rendering Index	82	
Over Time Performance (IEC Compliant)		
Lumen Maintenance 70% at 25°C Calculated	100000	
Lumen Maintenance 70% at 25°C Reported	60000	
Lumen Maintenance 70% at 40°C Calculated	100000	

Mechanical and Housing

Housing Material

Vaya Linear LP G2

Lumen Maintenance 70% at 40°C Reported	60000
Lumen Maintenance 80% at 25°C Calculated	87000
Lumen Maintenance 80% at 25°C Reported	60000
Lumen Maintenance 80% at 40°C Calculated	66000
Lumen Maintenance 80% at 40°C Reported	60000
Lumen Maintenance 90% at 25°C Calculated	41000
Lumen Maintenance 90% at 25°C Reported	41000
Lumen Maintenance 90% at 40°C Calculated	31000
Lumen Maintenance 90% at 40°C Reported	31000

Application Conditions


Ambient temperature range

-40 to +104 °F

Product Data 871869921814099 Full product code Order product name BCP422 G2 120 3000 L610 UL EAN/UPC - Product 8718699218140 Order code 912400136126 Local order code Numerator - Quantity Per Pack 1 Numerator - Packs per outer box 4 Material Nr. (12NC) 912400136126 Net Weight (Piece) 1.100 kg

IP 66 K 07

Dimensional drawing

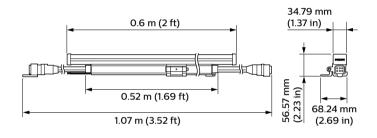

Vaya Linear LP Gen2



© 2018 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com 2018, December 3 - data subject to change