



PlainView, recessed

RC140B LED38S/840 PSD PCV PI5 L1150

840 neutral white, Power supply unit with DALI interface, Push-in connector 5-pole

Light line solutions are always in fashion. therefore we know that delivering innovation in this field is crucial. PlainView is a modern-looking, neat luminaire offering comfortable, good-quality lighting, which can also work as a design element. The luminaires offer high-quality specifications and flexibility with different options for lumen packages. Thanks to these features and benefits, PlainView delivers ideal lighting in the non-working areas of professional spaces such as offices, educational institutes and also the welcoming areas and entrances of retail spaces.

Product data

General Information			
Light source replaceable	No	Flammability mark	For mounting on normally flammable surfaces
Number of gear units	Unit	ENEC mark	-
Driver included	Yes	Glow-wire test	Temperature 650 °C, duration 30 s
Remarks	*- According to the Lighting Europe guidance paper 'Evaluating performance of LED based luminaires – January 2018': statistically there is no relevant difference in lumen maintenance between the B50 and, for example, the B10. Therefore, the median useful life (B50) value also represents the B10 value.	EU RoHS compliant	Yes
Lighting Technology	LED	Light Technical	
Value ladder	Performance	Luminous Flux	3,800 lm
CE mark	Yes	Correlated Colour Temperature	4000 K
Warranty period	5 years	Luminous efficacy (rated) (nom.)	90 lm/W
		Colour rendering index (CRI)	≥80
		Light source colour	840 neutral white
		Optic type	-
		Luminaire light beam spread	100°
		Unified Glare Rating (CEN)	28

PlainView, recessed

Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	22 A
Inrush time	275 ms
Power Consumption	40 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 5-pole
Cable	-
Number of products on MCB of 16 A type B	24

Temperature

Ambient temperature range	+10 to +40 °C
---------------------------	---------------

Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No

Mechanical and Housing

Housing material	Aluminium
Reflector material	-
Optic material	-
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Colour	White
Optical cover/lens finish	Opal
Overall length	1,150 mm
Overall width	74 mm

Overall height	82 mm
Dimensions (height x width x depth)	82 x 74 x 1150 mm

Approval and Application

Ingress protection code	IP40 [Wire-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-10%


Application Conditions

Performance ambient temperature Tq	25 °C
Maximum dim level	1%
Suitable for random switching	Yes

Product Data

Order product name	RC140B LED38S/840 PSD PCV PI5 L1150
Full product name	RC140B LED38S/840 PSD PCV PI5 L1150
Full EOC	871869938023699
Order code	38023699
Material no. (12 NC)	912401483009
SAP numerator – quantity per pack	1
EAN/UPC — Product/Case	8718699380236
Numerator – packs per outer box	4
EAN/UPC - Case	8718699380311

Dimensional drawing

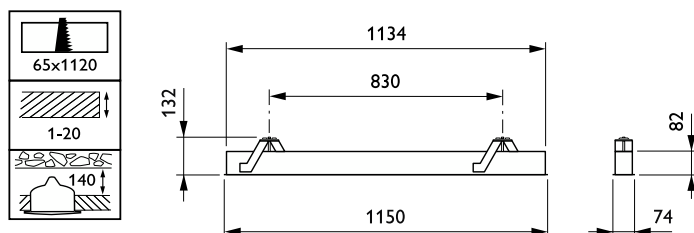

PlainView, recessed

