



# CoreLine Panel

## RC132V LED36S/840 W30L120 IA1 OC

840 neutral white – Power supply unit regulating

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Panel range of LED products can be used to replace functional luminaires in general lighting applications. Both Non-Office Compliant (NOC) version and Office Compliant version (OC) are now available. The process of selecting, installing and maintaining is so easy – it's a simple switch.

### Product data

General Information		Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore the median useful life (B50) value also represents the B10 value.
Beam angle of light source	120 °	Constant light output	No
Light source color	840 neutral white	Number of products on MCB of 16 A type B	24
Light source replaceable	No	RoHS mark	RoHS mark
Number of gear units	1 unit	Service tag	Yes
Driver/power unit/transformer	Power supply unit regulating	Unified glare rating CEN	19
Driver included	Yes	Operating and Electrical	
Optic type	-	Input Voltage	220-240 V
Luminaire light beam spread	90°	Input Frequency	50 to 60 Hz
Control interface	InterAct Pro	Average CLO power consumption	35 W
Connection	Push-in connector and pull relief	Inrush current	12 A
Cable	-		
Protection class IEC	Safety class I		
Glow-wire test	Temperature 650 °C, duration 30 s		
Flammability mark	For mounting on normally flammable surfaces		
CE mark	CE mark		
ENEC mark	ENEC mark		
Warranty period	5 years		

## CoreLine Panel

Inrush time	0.25 ms
Power Factor (Min)	0.9

### Controls and Dimming

Dimmable	Yes
----------	-----

### Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover/lens material	Polymethyl methacrylate
Fixation material	-
Optical cover/lens finish	Opal
Overall length	1197 mm
Overall width	297 mm
Overall height	42 mm
Color	White

### Approval and Application

Ingress protection code	IP20/44 [ Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [ 0.3 J]

### Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	3600 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	100 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	≥80

Initial chromaticity	(0.38, 0.38) SDCM <3
Initial input power	34 W
Power consumption tolerance	+/-10%

### Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L75

### Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	10%
Suitable for random switching	Yes

### Product Data

Full product code	871869938523100
Order product name	RC132V LED36S/840 W30L120 IA1 OC
EAN/UPC - Product	8718699385231
Order code	912401483130
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912401483130
Net Weight (Piece)	4.600 kg



## Dimensional drawing

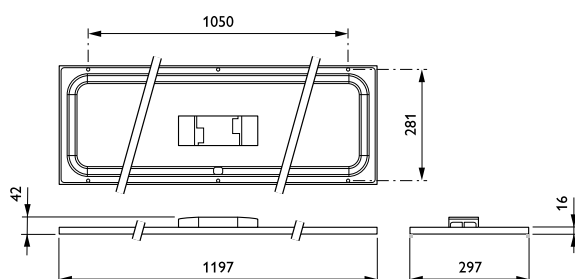

CoreLine Panel RC132V/RC133V

## CoreLine Panel

