



Flow LED

BGP490 LED21 I VP

LED module 2100 lm, 840 neutral white, Power supply unit (On/Off), Safety class I, Distribution symmetrical

Specially designed for slow-traffic underpass lighting, Flow LED combines elegance and style with high-performance LED lighting. Equipped with the newest Fortimo LED Line units, it easily outperforms conventional fluorescent fixtures.

Product data


General Information	
Lamp family code	LED21 [LED module 2100 lm]
Light source replaceable	Yes
Number of gear units	1 unit
Driver included	Yes
Light source engine type	LED
Service tag	No
Lighting Technology	LED
CE mark	Yes
Warranty period	3 years
Flammability mark	-
ENEC mark	ENEC mark
EU RoHS compliant	Yes
Light Technical	
Upward light output ratio	0
Luminous Flux	2,100 lm
Standard tilt angle posttop	-
Standard tilt angle side entry	-
Correlated Color Temperature (Nom)	4000 K

Luminous Efficacy (rated) (Nom)	100 lm/W
Color rendering index (CRI)	80
Light source color	840 neutral white
Optical cover type	Polycarbonate opal satinized
Luminaire light beam spread	120°
Optic type outdoor	Distribution symmetrical
Operating and Electrical	
Input Voltage	200 to 240 V
Line Frequency	50 to 60 Hz
Inrush current	13 A
Inrush time	270 ms
Power Consumption	21 W
Power Factor (Fraction)	0.9
Connection	Internal connector
Cable	-
Number of products on MCB of 16 A type B	24

Flow LED

Temperature	
Ambient temperature range	-20 to +40 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Aluminum extruded
Reflector material	Aluminum
Optic material	-
Optical cover material	Polycarbonate
Fixation material	Stainless steel
Housing Color	White
Mounting device	Heavy-duty mounting bracket
Optical cover shape	Curved
Optical cover finish	Opal
Overall length	705 mm
Overall width	260 mm
Overall height	71 mm
Effective projected area	0.18 m²
Dimensions (Height x Width x Depth)	71 x 260 x 705 mm
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK10 [20 J vandal-resistant]
Surge Protection (Common/Differential)	2 kV
Protection class IEC	Safety class I

Dimensional drawing

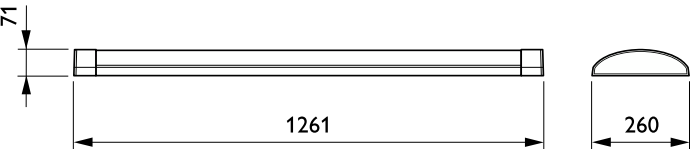

Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.380, 0.377) SDCM<3
Power consumption tolerance	+/-10%
Init. Color Rendering Index Tolerance	+/-2
Over Time Performance (IEC Compliant)	
Driver failure rate at 5000 h	0.1 %
Control gear failure rate at median useful life 100000 h	10 %
Lumen maintenance at median useful life* 50000 h	L80
Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Product Data	
Order product name	BGP490 LED21 I VP
Full product name	BGP490 LED21 I VP
Full product code	871869938525500
Order code	912401483146
Material Nr. (12NC)	912401483146
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699385255
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699385255

Flow LED

