



CoreLine panel

RC133V LED36S/840 PSD W62L62 OC

CoreLine panel, 35 W, 620x620 mm, 3600 lm, 4000 K, DALI, UGR19

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Panel range of LED products can be used to replace functional luminaires in general lighting applications. Both Non-Office Compliant (NOC) version and Office Compliant version (OC) are now available. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information		Flammability mark	
Light source replaceable	No	For mounting on normally flammable surfaces	
Number of gear units	1 unit	ENEC mark	ENEC mark
Driver included	Yes	Glow-wire test	Temperature 650 °C, duration 30 s
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	EU RoHS compliant	Yes
Light Technical			
Service tag	Yes	Luminous Flux	3,600 lm
Lighting Technology	LED	Correlated Color Temperature (Nom)	4000 K
Value ladder	Performance	Luminous Efficacy (rated) (Nom)	105 lm/W
CE mark	Yes	Color rendering index (CRI)	≥80
Warranty period	5 years	Beam angle of light source	120 degree(s)
		Light source color	840 neutral white
		Optic type	-
		Luminaire light beam spread	90°
		Unified glare rating CEN	19

CoreLine panel

Operating and Electrical	
Input Voltage	220-240 V
Line Frequency	50 to 60 Hz
Average CLO power consumption	35 W
Inrush current	20.4 A
Inrush time	0.195 ms
Power Consumption	35 W
Power Factor (Fraction)	0.9
Connection	Push-in connector and pull relief
Cable	-
Number of products on MCB of 16 A type B	24

Temperature	
Ambient temperature range	+10 to +40 °C

Controls and Dimming	
Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No

Mechanical and Housing	
Housing Material	Aluminum
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Aluminum
Housing Color	White
Optical cover finish	Opal
Overall length	622 mm
Overall width	622 mm
Overall height	42 mm
Dimensions (Height x Width x Depth)	42 x 622 x 622 mm

Approval and Application	
Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
Mech. impact protection code	IK03 [0.3 J]
Sustainability rating	-
Protection class IEC	Safety class II


Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* L75 50000 h	L75

Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	10%
Suitable for random switching	Yes

Product Data	
Order product name	RC133V LED36S/840 PSD W62L62 OC
Full product name	RC133V LED36S/840 PSD W62L62 OC
Full product code	871869938610800
Order code	38610800
Material Nr. (12NC)	912401483167
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699386108
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699386108

Dimensional drawing

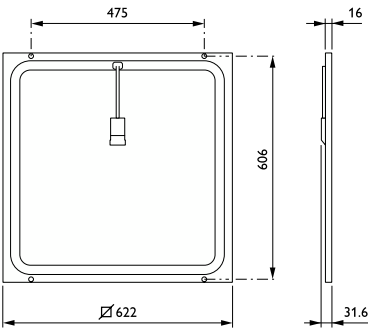

CoreLine panel

