

CoreLine panel

RC133V LED36S/840 PSU W62L62 NOC

CoreLine panel, 33 W, 620x620 mm, 3600 lm, 4000 K

Whether for a new building or renovation of an existing space, customers want lighting solutions that provide quality of light and substantial energy and maintenance savings. The new CoreLine Panel range of LED products can be used to replace functional luminaires in general lighting applications. Both Non-Office Compliant (NOC) version and Office Compliant version (OC) are now available. The process of selecting, installing and maintaining is so easy – it's a simple switch.

Product data

General Information			
Light source replaceable	No	Glow-wire test	Temperature 650 °C, duration 30 s
Number of gear units	1 unit	EU RoHS compliant	Yes
Driver included	Yes	Light Technical	
Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example B10. Therefore, the median useful life (B50) value also represents the B10 value.	Luminous Flux	3,600 lm
Service tag	Yes	Correlated Color Temperature (Nom)	4000 K
Lighting Technology	LED	Luminous Efficacy (rated) (Nom)	110 lm/W
Value ladder	Performance	Color rendering index (CRI)	≥80
CE mark	Yes	Beam angle of light source	120 degree(s)
Warranty period	5 years	Light source color	840 neutral white
Flammability mark	For mounting on normally flammable surfaces	Optic type	-
ENEC mark	ENEC mark	Luminaire light beam spread	110°
		Unified glare rating CEN	22
		Operating and Electrical	
		Input Voltage	220-240 V
		Line Frequency	50 to 60 Hz
		Average CLO power consumption	33 W
		Inrush current	6 A

CoreLine panel

Inrush time	0.3 ms
Power Consumption	33 W
Power Factor (Fraction)	0.9
Connection	Push-in connector and pull relief
Cable	Cable 0.25 m with push-in connector 3-pole
Number of products on MCB of 16 A type B	24

Temperature

Ambient temperature range	+10 to +40 °C
---------------------------	---------------

Controls and Dimming

Dimmable	No
Driver/power unit/transformer	Power supply unit (On/Off)
Constant light output	No

Mechanical and Housing

Housing Material	Aluminum
Reflector material	-
Optic material	Polymethyl methacrylate
Optical cover material	Polymethyl methacrylate
Fixation material	Aluminum
Housing Color	White
Optical cover finish	Opal
Overall length	622 mm
Overall width	622 mm
Overall height	32 mm
Dimensions (Height x Width x Depth)	32 x 622 x 622 mm

Approval and Application

Ingress protection code	IP20/44 [Finger-protected; wire-protected, splash-proof]
-------------------------	--

Mech. impact protection code	IK03 [0.3 J]
Sustainability rating	-
Protection class IEC	Safety class II

Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Initial chromaticity	(0.38, 0.38) SDCM <3
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L75


Application Conditions

Performance ambient temperature Tq	25 °C
Suitable for random switching	Not applicable

Product Data

Order product name	RC133V LED36S/840 PSU W62L62 NOC
Full product name	RC133V LED36S/840 PSU W62L62 NOC
Full product code	871869938615300
Order code	38615300
Material Nr. (12NC)	912401483172
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718699386153
Numerator - Packs per outer box	1
EAN/UPC - Case	8718699386153

Dimensional drawing

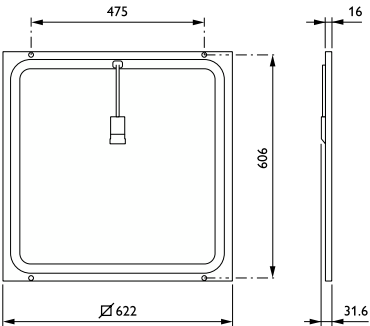

CoreLine panel

