



# GreenSpace Downlight G4

## DN470T LED20S/830 PSED D22H16 5C6 WH

LED Module, system flux 2000 lm - 830 warm white - Power supply unit with DALI interface - - - - - Connection unit 5-pole - Finger-protected - White RAL 9003 - 217 mm

GreenSpace Gen4 is the new LED downlight with high efficacy (95~ 100lm/W) delivering substantial energy saving. It offers diverse configurations within 600~2,000lm. GreenSpace Gen4 could apply to shopping mall, retail store and office application with different variants . The lifetime is 50,000 hours (L70 @ 25C)

### Product data

General Information			
Number of light sources	1 [ 1 pc]	Connection	Connection unit 5-pole
Lamp family code	LED20S [ LED Module, system flux 2000 lm]	Cable	-
Light source colour	830 warm white	Protection class IEC	Safety class II
Cap base	- [ -]	Glow-wire test	Temperature 650 °C, duration 5 s
Light source replaceable	No	Flammability mark	F [ For mounting on normally flammable surfaces]
Number of gear units	1 unit	CE mark	CE mark
Driver/power unit/transformer	PSD [ Power supply unit with DALI interface]	Warranty period	5 years
Driver included	Yes	Constant light output	No
Optic type	No [ -]	Number of products on MCB	24
Luminaire light beam spread	88°	RoHS mark	RoHS mark
Emergency lighting	No [ -]	Accessory PFC	false
Control interface	DALI	Unified glare rating CEN	22

# GreenSpace Downlight G4

## Operating and Electrical

Input voltage	220 to 240 V
Input frequency	50 to 60 Hz
Control signal voltage	0-16 V DC DALI
Inrush current	20.4 A
Inrush time	0.195 ms
Power factor (min.)	0.90

## Controls and Dimming

Dimmable	Yes
----------	-----

## Mechanical and Housing

Housing material	Plastic
Optic material	-
Fixation material	-
Optical cover/lens finish	Clear
Overall height	208 mm
Overall diameter	218 mm
Diameter	217 mm
Colour	White RAL 9003

## Approval and Application

Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]

## Initial Performance (IEC Compliant)

Initial luminous flux	2100 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	110 lm/W
Init. Corr. colour temperature	3000 K

Init. colour rendering index	>80
Initial chromaticity	(0.43, 0.40) SDCM<3.5
Initial input power	19.2 W
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80

## Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dimming level	1%

## Product Data

Full product code	871869938953600
Order product name	DN470T LED20S/830 PSED D22H16 5C6 WH
EAN/UPC – product	8718699389536
Order code	38953600
Numerator – quantity per pack	1
Numerator – packs per outer box	1
Material no. (12NC)	912500100273
Net weight (piece)	1.300 kg



## Dimensional drawing

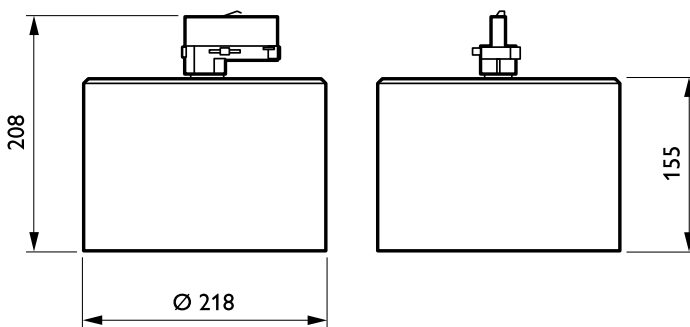

GreenSpace gen2 DN460B-DN473B

## GreenSpace Downlight G4

