



GreenSpace

DN460B LED11S/840 PSE-E C ELP3 WH P

GreenSpace Mini UGR22 - LED Module, system flux 1100 lm - 840 neutral white - Power supply unit DC-compatible, external - High-gloss mirror - Emergency lighting 3 hours duration - Feed-through connector 3-pole - Finger-protected - White

Customers want to strike the ideal balance between their initial investment and the cost of the installation during its lifetime. GreenSpace is a cost-efficient and sustainable downlight that can be used to replace conventional CFL downlights in general lighting applications. It features the latest LED technology, which enables extremely low power consumption, while delivering consistent light output, stable color performance and high color rendering. The product's long lifetime makes it a true 'fit and forget' solution.

Product data

General Information		Control interface	
Number of light sources	1 pc	Control interface	-
Lamp family code	LED11S [LED Module, system flux 1100 lm]	Connection	Feed-through connector 3-pole
Beam angle of light source	- °	Cable	-
Light source color	840 neutral white	Protection class IEC	Safety class II
Cap-Base	- [-]	Glow-wire test	Temperature 750 °C, duration 5 s
Light source replaceable	No	Flammability mark	-
Number of gear units	1 unit	CE mark	CE mark
Gear	-	ENEC mark	ENEC mark
Driver/power unit/transformer	Power supply unit DC-compatible, external	Warranty period	5 years
Driver included	Yes	Remarks	*-Per Lighting Europe guidance paper "Evaluating performance of LED based luminaires - January 2018": statistically there is no relevant difference in lumen maintenance between B50 and for example
Optic type	High-gloss mirror		
Luminaire light beam spread	120°		
Emergency lighting	Emergency lighting 3 hours duration		

	B10. Therefore the median useful life (B50) value also represents the B10 value.
Constant light output	No
Number of products on MCB of 16 A type B	36
RoHS mark	RoHS mark
Product family code	DN460B [GreenSpace Mini UGR22]
Unified glare rating CEN	22

Light Technical

Optical cover/lens type accessory	-
-----------------------------------	---

Operating and Electrical

Input Voltage	220-240 V
Input Frequency	50 to 60 Hz
Initial CLO power consumption	- W W
Average CLO power consumption	- W W
Inrush current	15,8 A
Inrush time	0.224 ms
Power Factor (Min)	0.9

Controls and Dimming

Dimmable	No
----------	----

Mechanical and Housing

Housing Material	Polycarbonate
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	-
Fixation material	-
Optical cover/lens finish	-
Overall height	77 mm
Overall diameter	166 mm
Color	White

Approval and Application

Ingress protection code	IP20 [Finger-protected]
-------------------------	--------------------------

Mech. impact protection code	IK02 [0.2 J standard]
------------------------------	------------------------

Initial Performance (IEC Compliant)

Initial luminous flux (system flux)	1125 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	114 lm/W
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial chromaticity	(0.38, 0.38) SDCM <3.5
Initial input power	9.8 W
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)


Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L80

Application Conditions


Ambient temperature range	+10 to +40 °C
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Yes

Product Data

Full product code	871869979340100
Order product name	DN460B LED11S/840 PSE-E C ELP3 WH P
EAN/UPC - Product	8718699793401
Order code	912500100535
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	912500100535
Net Weight (Piece)	1.250 kg





Dimensional drawing

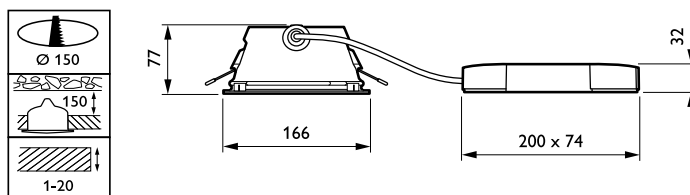

GreenSpace gen2 DN460B-DN473B

Photometric data

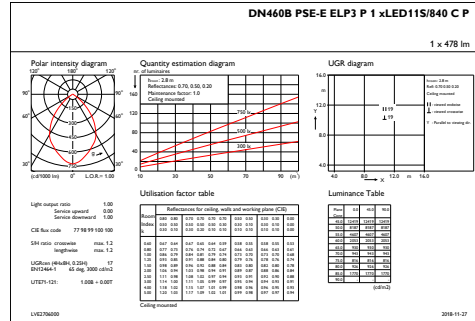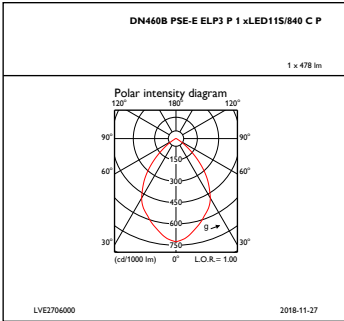

IFPC1_DN460BPSE-EELP3P1xLED11S840CP

IFGU1_DN460BPSE-EELP3P1xLED11S840CP

