



Mark III

MARK III MAG BALLAST (2) F96T12/HO 347V

Available for many linear fluorescent lamp types sold today, including Rapid Start, Slimline, High Output and Very High Output. Magnetic ballasts can be used in any application where these lamps are used.

Product data

General Information	
Lamp Type	F96T12/HO
Number of Lamps	2 piece/unit
Lamp Footage	-
Ballast Type	Magnetic Fluorescent
Base Model	G25110TP
Suitable For Outdoor Use	Yes
Automatic Restart	Yes
Operating and Electrical	
Input Voltage	347 V
Input Frequency	60 Hz
Max THD	20 %
Starting Method	Rapid Start
Lamp Current Crest Factor (Nom)	1.7
Ignition Time (Nom)	1 s
Ballast Factor (Nom)	0.95
Power Factor (Nom)	0.984
Input Current (Operating) (Nom)	0.69 A
Input Power (Nom)	237 W
Rated Lamp Watts	110 W
Wiring	
Wire Striplength	0.50/0.375 mm

Lamp Connection	Series
Wire Length by Color	See data sheet
Wire Gauge (Nom)	18AWG mm
Wire Type	Solid
Remote Wiring Configuration Allowed	Yes
Tandem Wiring Configuration Allowed	Yes
Through Wiring Configuration Allowed	Yes
Max Ballast-Lamp Distance Remote Wiring	15'
Max Ballast-Lamp Distance Tandem Wiring	Any = 15'
Max Ballast-Lamp Distance Through Wiring	Any = 15'

Mechanical and Housing	
Housing Material	Metal
Housing	R9
Housing Dimensions	11.75" x 3.19" x 2.63"


Approval and Application	
EMC Immunity Standard	FCC Non-Consumer
Approbation Marks	CSA certificate UL certificate RoHS Compliant
Sound Rating	C
UL Recognized	No

Mark III

Product Data	
Order product name	MARK III MAG BALLAST (2) F96T12/HO 347V
EAN/UPC - Product	781087000533
Order code	G2S110TPM
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	6
Material Nr. (12NC)	913700523009
Net Weight (Piece)	5.203 kg

Dimensional drawing

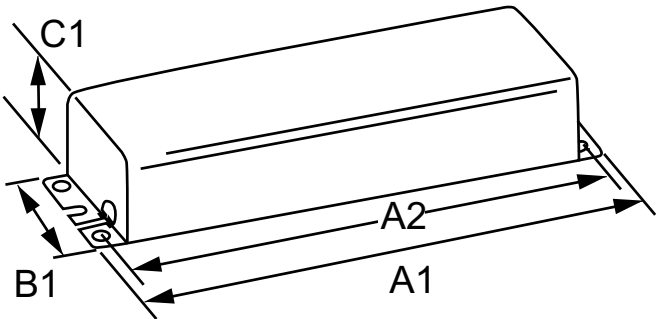

Product	A1	A2	B1	C1
MARK III MAG BALLAST (2) F96T12/HO 347V	11.75 in	11.14 in	3.19 in	2.63 in

MAG BALLAST (2) F96T12/HO 347V

