



Optanium T8 Instant Start

OPTANIUM ELE BALLAST (2) F32T8 347V

Reliable and energy efficient Philips Advance's Centium commercial grade specifications, plus added benefits of lamp striation reduction technology.

Product data


General Information		Color Output Terminals	
Lamp Type	F32T8		No terminals
Number of Lamps	1-2 piece/unit	Wire Striplength	0.375 mm
Ballast Type	Electronic Fluorescent	Lamp Connection	Parallel
Base Model	GOPA2P32LWSC	Wire Length by Color	See data sheet
Suitable For Outdoor Use	Yes	Wire Gauge (Nom)	18AWG mm
Automatic Restart	Yes	Wire Type	Solid
Operating and Electrical		Remote Wiring Configuration Allowed	Yes
Input Voltage	347 V	Tandem Wiring Configuration Allowed	Yes
Input Frequency	50 to 60 Hz	Through Wiring Configuration Allowed	Yes
Starting Method	Instant Start	Connector Type	No connector
Lamp Current Crest Factor (Nom)	1.6	Temperature	
Ignition Time (Nom)	0.1 s	T-Case Maximum (Nom)	70 °C
Ballast Factor (Nom)	0.78	Mechanical and Housing	
Power Factor (Nom)	0.98	Housing Material	Metal
Input Current (Operating) (Nom)	0.14 A	Housing	N
Input Power (Nom)	48 W	Housing Dimensions	9.5" x 1.3" x 1.0"
Rated Lamp Watts	32 W	Approval and Application	
Wiring		EMC Immunity Standard	FCC Non-Consumer
Color Input Terminals	No terminals		

Optanium T8 Instant Start

Approbation Marks	CSA certificate UL certificate CEE Rated CSA E
	RoHS Compliant
Sound Rating	A
UL Recognized	No
Product Data	
Order product name	OPTANIUM ELE BALLAST (2) F32T8 347V
EAN/UPC - Product	781087142370

Order code	GOPA2P32LWN35M
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	30
Material Nr. (12NC)	913701266102
Net Weight (Piece)	350.000 g

Dimensional drawing

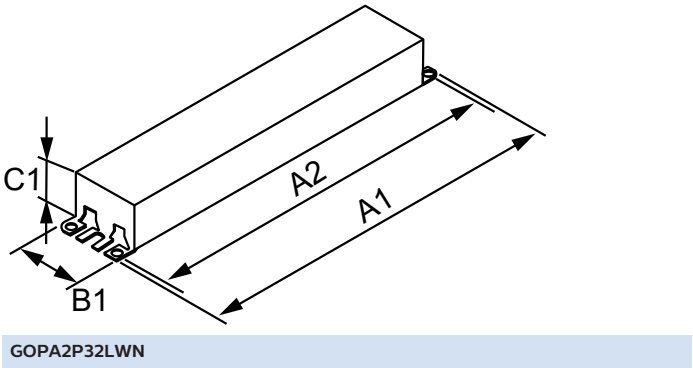

Product	A1	A2	B1	C1
OPTANIUM ELE BALLAST (2) F32T8 347V	9.5 in	8.90 in	1.3 in	1.0 in

