



Dynalite User Interfaces

DR2PA-LXX-X-W-SS-P-BW-X-X-Y

The Revolution series of user interfaces provides a direct connection to the DyNet network. The devices can communicate directly with each other, with lighting load controllers and with other integration devices, offering a simple user interface capable of complex automation system functions. The DR2PA range is suitable for, but not limited to, North American, South American, Australian and New Zealand markets. The 12NC code is for the DR2PA Revolution Series keypad, L configuration, white button & stainless steel finish. Please contact your local Philips representative for product variations.

The Revolution series of user interfaces provides a direct connection to the DyNet network. The devices can communicate directly with each other, with lighting load controllers and with other integration devices, offering a simple user interface capable of complex automation system functions. The DR2PA range is suitable for, but not limited to, North American, South American, Australian and New Zealand markets. The 12NC code is for the DR2PA Revolution Series keypad, L configuration, white button & stainless steel finish. Please contact your local Philips representative for product variations.

Product data


General Information		Remarks
CE mark	CE mark	Please download the Lighting - Product Data Sheet for more information and ordering options

Dynalite User Interfaces


FCC mark	FCC Class A
RoHS mark	RoHS mark
Product family code	YUCPAN [User Control Panels]
Application Conditions	
Ambient temperature range	0 to +50 °C
Product Data	
Full product code	871016353844000

Order product name	DR2PA-LXX-X-W-SS-P-BW-X-X-Y
EAN/UPC - Product	8710163538440
Order code	913703600409
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	913703600409
Net Weight (Piece)	0.115 kg

Dimensional drawing



Dynalite User Interfaces

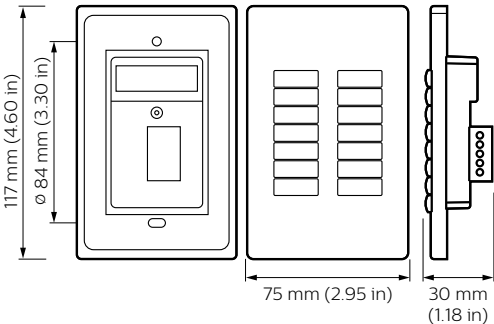

Dynalite User Interfaces

