



# Capacitors for HID lamp circuits

## CP 32CT28

Compensating capacitors are AC capacitors designed for individual correction of the power factor of transformers and magnetic ballasts in discharge lamps (e.g. fluorescent lamps, halogen and metal halide lamps, high-pressure mercury lamps, sodium lamps) in mains with a frequency of 50 or 60Hz. This allows for an improvement of the luminary's power factor to  $\cos\mu > 0.85$

### Product data

| Operating and Electrical |             |
|--------------------------|-------------|
| Input Voltage            | 250 V       |
| Line Frequency           | 50 to 60 Hz |
| Input Frequency          | 50 to 60 Hz |

---

| Wiring                          |  |
|---------------------------------|--|
| Connector Type Output Terminals | push in connector or insulated wires or flat quick-connector |

---

| Temperature               |                 |
|---------------------------|-----------------|
| Ambient temperature range | -40 °C to 85 °C |

---

| Mechanical and Housing |       |
|------------------------|-------|
| Housing                | M8x10 |


---

| Approval and Application |   |
|--------------------------|---|
| Approval Marks           | Conform GB18489-2001 Conform GB/T18504-2001<br>CE marking VDE certificate China Quality Certificate<br>CB Certificate |

| Product Data                    |                 |
|---------------------------------|-----------------|
| Full product code               | 697480505049900 |
| Order product name              | CP 32CT28       |
| Order code                      | 913710012391    |
| Numerator - Quantity Per Pack   | 1               |
| Numerator - Packs per outer box | 72              |
| Material number (12NC)          | 913710012391    |
| Full product name               | CP 32CT28       |
| EAN/UPC - Case                  | 6974805050505   |

## Capacitors for HID lamp circuits

### Dimensional drawing

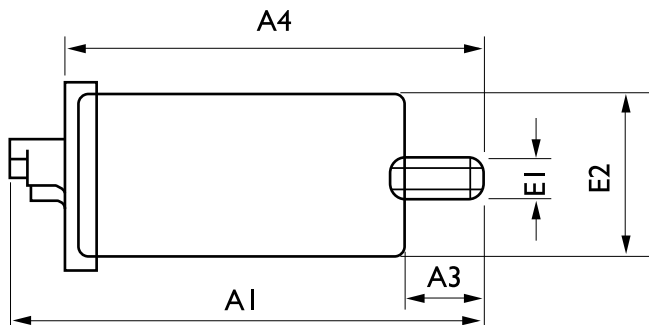

| Product   | E2      | A1       | A4       |
|-----------|---------|----------|----------|
| CP 32CT28 | 38.0 mm | 120.0 mm | 108.0 mm |

