


PHILIPS

Lighting

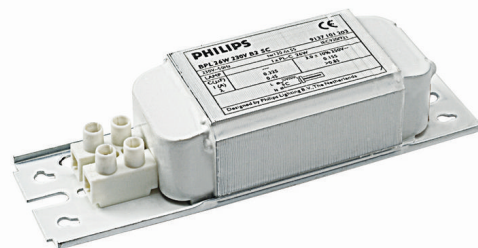

BPL EM ballasts for CFL, PL-T, PL-S and PL-C lamps

BPL 26W 230V B2 SC

This standard, reliable, long-life electromagnetic ballast for compact fluorescent lamps provides excellent performance with 2-pin and 4-pin CFLni lamps.

Product data

General Information	
Application Code	26W
Design	B2

Operating and Electrical	
Input Voltage	230 V
Input Frequency	50 Hz
Mains Voltage Performance (AC)	-8%~+6%
Mains Voltage Safety (AC)	-10%~+10%
Power Factor with PF Compensation	0.85
Power Factor without PF Compensation (Nom)	0.45
Power Losses (Nom)	6.9 W

Wiring	
Wire Striplength	8.0 mm
Ballast Contact Wire Cross Section	0.50-1.00 mm ²
Connector Type	Screw

System characteristics	
Rated Ballast-Lamp Power	26 W

Temperature	
T-Storage (Max)	80 °C
T-Storage (Min)	-40 °C
T-Winding (Max)	130 °C
Delta-T Normal Conditions	55 °C

Mechanical and Housing	
Housing	L 130x39x28

Approval and Application	
Energy Efficiency Index	B2
Approval Marks	CE marking


Product Data	
Full product code	871016306556430
Order product name	BPL 26W 230V B2 SC
EAN/UPC - Product	8710163150024

BPL EM ballasts for CFL, PL-T, PL-S and PL-C lamps

Order code	913710120350
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	32
Material Nr. (12NC)	913710120350

Net Weight (Piece)	0.488 kg
--------------------	----------

Dimensional drawing



BPL 26W 230V B2 'SC

Product	D1	C1	A1	A2	A3	A4	B1
BPL 26W 230V	4.0 mm	28.0	130.0	115.0	45.0	56.0	39.0
B2 SC		mm	mm	mm	mm	mm	mm

