



# Standard

## STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

Available for many fluorescent lamp types sold today, including Preheat, Rapid Start, 2-pin CFL, Slimline, High Output, Very High Output and Circline. Magnetic ballasts can be used in any application where these lamps are used.

### Product data


<b>General Information</b>		<b>Rated Lamp Watts</b>	
Lamp Type	CFQ13W/GX23	13 W	
Number of Lamps	1 piece/unit		
Lamp Footage	-		
Ballast Type	Magnetic Fluorescent		
Base Model	H1B13TPW		
Suitable For Outdoor Use	Yes		
Automatic Restart	Yes		
<b>Operating and Electrical</b>		<b>Wiring</b>	
Input Voltage	120 V	Wire Striplength	0.50/0.375 mm
Input Frequency	60 Hz	Lamp Connection	Series
Max THD	25 %	Wire Length by Color	See data sheet
Starting Method	Preheat	Wire Gauge (Nom)	18AWG mm
Lamp Current Crest Factor (Nom)	1.5	Wire Type	Solid
Ignition Time (Nom)	1 s	Remote Wiring Configuration Allowed	Yes
Inp. Current (Open Circuit)	0.22	Tandem Wiring Configuration Allowed	No
Input Current (Starting)	0.36	Through Wiring Configuration Allowed	No
Ballast Factor (Nom)	0.91	Max Ballast-Lamp Distance Remote Wiring	30'
Power Factor (Nom)	0.95	Max Ballast-Lamp Distance Tandem Wiring	-
Input Current (Operating) (Nom)	0.14 A	Max Ballast-Lamp Distance Through Wiring	-
Input Power (Nom)	16 W	<b>Mechanical and Housing</b>	
		Housing Material	Metal
		Housing	R1
		Housing Dimensions	4.25" x 2.0" x 1.44"
		<b>Approval and Application</b>	
		EMC Immunity Standard	FCC Non-Consumer

Standard

Approbation Marks	CSA certificate UL certificate RoHS Compliant
Sound Rating	A
UL Recognized	No
Product Data	
Order product name	STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

EAN/UPC - Product	781087066850
Order code	H1B13TPWI
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	913710304401
Net Weight (Piece)	386.000 g

Dimensional drawing

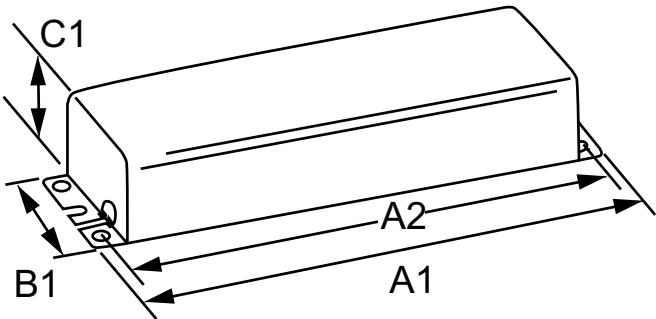

Product	A1	A2	B1	C1
STANDARD MAG BALLAST (1) 13W COMPACT(2-PIN) 120V	4.25 in	3.56 in	2 in	1.44 in

MAG BALLAST (1) 13W COMPACT(2-PIN) 120V

