



HID-CertaVision for CDM

HID-CV 70 /S CDM 220-240V

HID-CertaVision electronic ballast for use with ceramic metal-halide (CDM) lamps

Product data


General information		Connector type		Push
Lamp type	CDM	System characteristics		
Number of lamps	1 piece/unit	Rated ballast-lamp power	70 W	
Number of products on MCB (16 A type B) (nom.)	20	Temperature		
Operating and electrical		T-ambient (max.)	55 °C	
Input Voltage	220 to 240 V	T-ambient (min.)	-20 °C	
Input frequency	50 to 60 Hz	T storage (max.)	80 °C	
Minimum mains voltage operation (min.)	198 V	T storage (min.)	-25 °C	
Power factor 100% load (nom.)	0.95	T-case lifetime (nom.)	85 °C	
Ignition voltage (max.)	5.0 kV	T-Case maximum (max.)	85 °C	
Ignition voltage (min.)	3.0 kV	Mechanical and housing		
Mains voltage performance (AC)	198-264V	Housing	/S	
Mains voltage safety (AC)	180-264V	Approval and application		
Output peak voltage (max.)	5000 V	EMI 30 MHz ... 1,000 MHz	CISPR15 Edition 7.1	
Inrush current width	0.33 ms	Approval marks	CE marking	
Constant wattage deviation	-5%/+5%	Product data		
Power losses (nom.)	9 W	Full product code	694793917420100	
Inrush current peak (nom.)	33.0 A	Order product name	HID-CV 70 /S CDM 220-240V	
Wiring				
Cable capacity output wires mutual (nom.)	120 pF			
Cable length from device to lamp	2 m			

HID-CertaVision for CDM

EAN/UPC – product	6947939174201
Order code	17420100
SAP numerator – quantity per pack	1
Numerator – packs per outer box	12

SAP material	913712006780
Copy Net Weight (Piece)	0.213 kg

Dimensional drawing

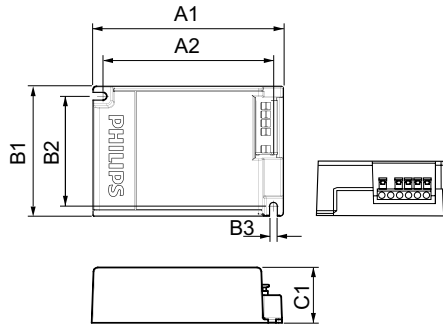

Product	C1	A1	A2	B1	B2	B3
HID-CV 70 /S CDM 220-240V	32.1 mm	110.0 mm	98.5 mm	75.0 mm	63.7 mm	4.5 mm

HID-CV 70 /S CDM 220-240V

