



# EcoAccent RC271B

## RS271B LED40/840 PSU-E MB WH

EcoAccent is the LED solution for shop lighting targeting energy savings. With a system efficacy of 95 lm/W in average, delivers more than 40% energy efficient compared to CDM solution. EcoAccent helps save energy and at the same time provides excellent lighting for retail environment thus enhancing the retail experience. The option of different light distribution for Accent light and variety of lumen packs and colour temperatures makes it an ideal solution for retail lighting.


### Product data

General Information	
Light source color	840 neutral white
Luminaire light beam spread	24°
Control interface	-
Protection class IEC	Safety class I (I)
Material	Aluminum
Operating and Electrical	
Input Voltage	240 V
Input Frequency	50 Hz
Power Factor (Min)	0.9
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Aluminum die-cast
Overall height	142 mm
Overall diameter	195 mm
Color	White

Approval and Application	
Ingress protection code	IP20 [ Finger-protected]
Mech. impact protection code	IK02 [ 0.2 J standard]
Surge Protection (Common/Differential)	2.5 kV
Initial Performance (IEC Compliant)	
Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	>80
Initial input power	42 W
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Median useful life L70B50	30000 h
Application Conditions	
Ambient temperature range	0 to +45 °C
Product Data	
Order product name	RS271B LED40/840 PSU-E MB WH
Order code	919515810956
Numerator - Quantity Per Pack	1

# EcoAccent RC271B

Numerator - Packs per outer box	1
Material Nr. (12NC)	919515810956
Net Weight (Piece)	0.900 kg




## Warnings and Safety

- To be used in Indoor Environment only

## Dimensional drawing

Product: XRA RECESSED  
Type: RC271B  
Application: Indoor

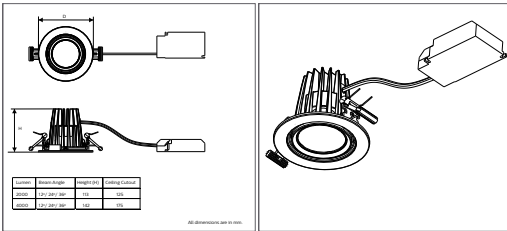

IN9002RDL - Downlights and spots

