



Pureline SP680P

SP680X2 LED78S 4000 PSU WH L240 S1


The PureLine family of luminaires gives you compromise-free office illumination. It is a perfect solution for office application and general indoor area lighting. The range brings together high-flux lighting with a homogeneous optical system without making any concessions on energy efficiency design.

Product data

| General Information | | Approval and Application | |
|-----------------------------|--------------------|--|------------------------------------|
| Light source color | 840 neutral white | Ingress protection code | IP20 [Finger-protected] |
| Luminaire light beam spread | 110° | Mech. impact protection code | IK02 [0.2 J standard] |
| Control interface | - | Surge Protection (Common/Differential) | 2.5 kV |
| Protection class IEC | Safety class I (I) | Initial Performance (IEC Compliant) | |
| Material | Aluminum | Init. Corr. Color Temperature | 4000 K |
| Operating and Electrical | | Init. Color Rendering Index | >80 |
| Input Voltage | 220-240 V | Initial input power | 76 W |
| Input Frequency | 50 Hz | Power consumption tolerance | +/-10% |
| Power Factor (Min) | 0.9 | Over Time Performance (IEC Compliant) | |
| Controls and Dimming | | Median useful life L70B50 | 50000 h |
| Dimmable | No | Application Conditions | |
| Mechanical and Housing | | Ambient temperature range | 0 to +45 °C |
| Housing Material | Aluminum extruded | Product Data | |
| Overall length | 4564 mm | Order product name | SP680X2 LED78S 4000 PSU WH L240 S1 |
| Overall width | 150 mm | Order code | 919515811516 |
| Overall height | 43 mm | Numerator - Quantity Per Pack | 1 |
| Color | White | Numerator - Packs per outer box | 1 |
| | | Material Nr. (12NC) | 919515811516 |

Pureline SP680P

Net Weight (Piece) 5.000 kg




Warnings and Safety

- Meant for use in Indoor environment only

Dimensional drawing

Product: Pureline Suspended
Type: SP680
Application: Indoor

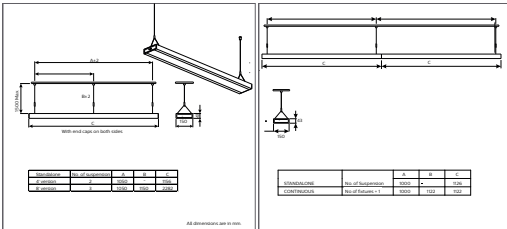

IN9002SUS - Suspended luminaires

