



Plusline Large (double ended)

Plusline L 1000W R7s 240V 1CT/10

PlusLine Large flood delivers maximum light output to light up large areas like outdoor, buildings and shops.

Product data


General Information					
Cap-Base	R7s				
Operating Position	P4 [Parallel +/-4D or Horizontal(HOR)]				
Nominal lifetime	2,000 hour(s)				
Switching Cycle	8,000				
Rated Lifetime (Hours)	2,000 hour(s)				
Lighting Technology	Halogen				
Light Technical					
Luminous Flux	21,500 lm				
Correlated Color Temperature (Nom)	2900 K				
Luminous Efficacy (rated) (Nom)	21.5 lm/W				
Color rendering index (CRI)	100				
Operating and Electrical					
Power Consumption	1,000.0 W				
Lamp Current (Nom)	4.17 A				
Starting Time (Nom)	0.0 s				
Warm-up time to 60% light	instant full light s				
Power Factor (Fraction)	1				
Voltage (Nom)	240 V				
Voltage (Nom)	240 V				

Controls and Dimming					
Dimmable	Yes				
Mechanical and Housing					
Bulb Finish	Clear				
Bulb Shape	T11				
Approval and Application					
Energy Consumption kWh/1000 h	1000 kWh				
Product Data					
Order product name	Plusline L 1000W R7s 240V 1CT/10				
Full product name	Plusline L 1000W R7s 240V 1CT/10				
Full product code	871150005597201				
Order code	923932145703				
Material Nr. (12NC)	923932145703				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8711500055972				
Numerator - Packs per outer box	10				
EAN/UPC - Case	8718291720829				

Datasheet, 2024, February 7 data subject to change

Plusline Large (double ended)

Dimensional drawing

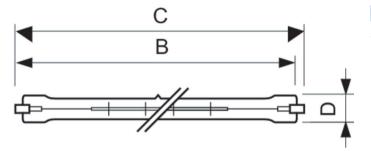

Product	D (max)	B (max)	В	B (min)	C (max)
Plusline L 1000W R7s 240V 1CT/10	11 mm	187.3 mm	185.7 mm	184.1 mm	189.1 mm

