



PL-S 2 Pin

PL-S 9W/827/2P 1CT/25

PL-S is an efficient low-wattage compact fluorescent lamp, typically used for decorative and orientation purposes. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 2-pin version is designed for operation on electromagnetic gear and is provided with a plug-in/pull-out lamp base.


Product data

General Information	
Cap base	G23 [G23]
Life to 50% failures (nom.)	8000 h
Light Technical	
Colour Code	827 [CCT of 2,700 K]
Lamp Luminous Flux 25°C EL (Nom)	600 lm
Colour Designation	Incandescent White
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 5,000 hours (nom.)	81 %
Colour Temperature, horizontal (Nom)	2700 K
Lamp Luminous Efficacy EM (Nom)	69 lm/W
Colour Rendering Index,horiz (Nom)	>80
Operating and Electrical	
Power (Rated) (Nom)	8.6 W
Lamp current (nom.)	0.170 A
Voltage (Nom)	60 V
Controls and Dimming	
Dimmable	no

Mechanical and Housing	
Cap base information	2P
Approval and Application	
Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	1.4 mg
Product Data	
Full product code	871150070679900
Order product name	PL-S 9W/827/2P 1CT/25
EAN/UPC – product	8711500706799
Order code	927901708265
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927901708265
Net weight (piece)	0.032 kg
ILCOS Code	FSD-9/27/1B-I-G23

PL-S 2 Pin


Dimensional drawing




PL-S 9W/827/2P

Product	D (max)	D1 (max)	C (max)
PL-S 9W/827/2P 1CT/25	27.1 mm	13 mm	167.5 mm

Photometric data

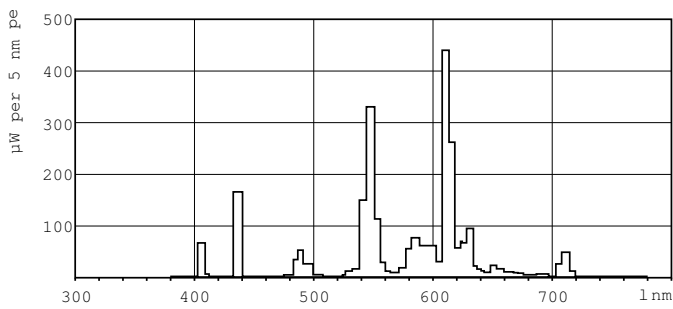

Lightcolour /827

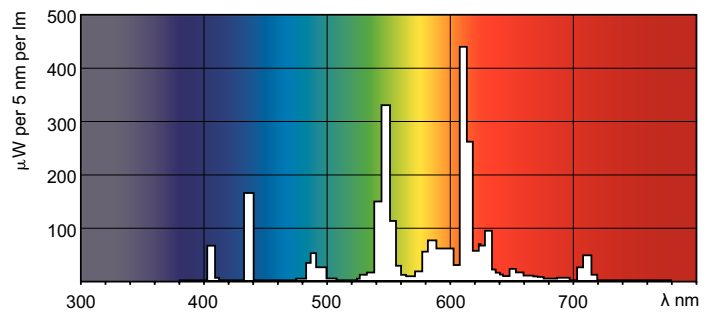

Lightcolour /827

