



# Actinic BL PL-S/PL-L

## PL-S 11W/10/2P 1CT/6X10BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data

General Information	
Cap base	G23 [ G23]
Life to 50% failures (nom.)	8000 h
Useful life (nom.)	2000 h
Light Technical	
Colour Code	210 [ leadfree 360 glass (10)]
Colour Designation	Ultra Violet A
Chromaticity coordinate X (nom.)	227
Chromaticity coordinate Y (nom.)	212
Depreciation at 500 Hours	15 %
Depreciation at 500 Hours	30 %
Operating and Electrical	
Power (Rated) (Nom)	11.6 W
Lamp current (nom.)	0.16 A
Voltage (Nom)	89 V


Mechanical and Housing	
Cap base information	2 Pins (2P)
UV	
UV-A radiation 100 hours (IEC)	2.81 W
Product Data	
Full product code	871150095201180
Order product name	PL-S 11W/10/2P 1CT/6X10BOX
EAN/UPC – product	8711500952011
Order code	927902321007
Numerator – quantity per pack	1
Numerator – packs per outer box	60
Material no. (12NC)	927902321007
Net weight (piece)	43.000 g

## Actinic BL PL-S/PL-L

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing




Product	D1 (max)	D (max)	A (max)	B (max)	C (max)
PL-S 11W/10/2P 1CT/ 6X10BOX	13 mm	28 mm	198 mm	213.3 mm	236.3 mm

PL-S 11W/210/2P

### Photometric data

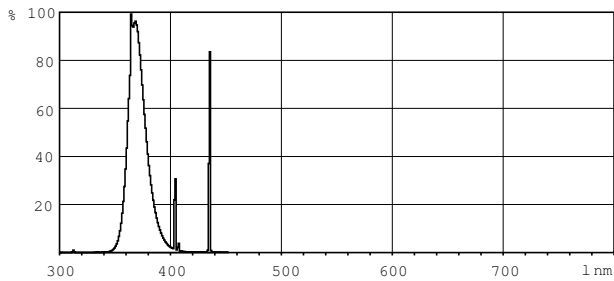

Lightcolour /10, /110 & /210

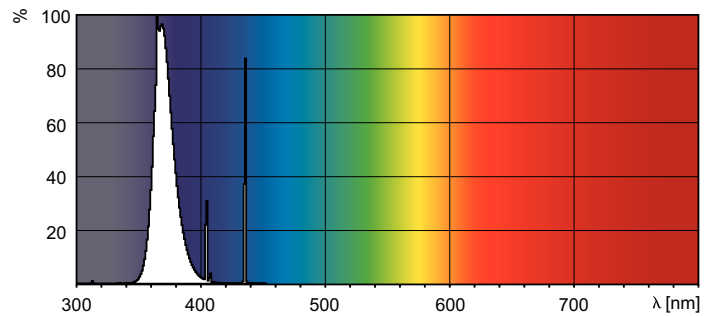

Lightcolour /10, /110 & /210

