



# PL-S Short 2-Pin Base

## PL-S 13W/850/2P/ALTO/BULK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Warnings and Safety

- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050


### Product data

General Information	
Cap-Base	GX23 [GX23]
Life to 50% Failures (Nom)	10,000 hour(s)
Light Technical	
Color Code	850 [CCT of 5000K]
Luminous Flux	810 lm
Color Designation	Daylight
Correlated Color Temperature (Nom)	5000 K
Color rendering index (CRI)	82
Operating and Electrical	
Power Consumption	13 W
Lamp Current (Nom)	0.290 A
Controls and Dimming	
Dimmable	No

Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Order product name	PL-S 13W/850/2P/ALTO/BULK
Full product name	PL-S 13W/850/2P/ALTO/BULK
Order code	146886
Material Nr. (12NC)	927902785022
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677146887
Numerator - Packs per outer box	50
EAN/UPC - Case	50046677146882



PL-S Short 2-Pin Base

Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-S 13W/850/2P/ALTO/BULK	28 mm	13 mm	139.5 mm	155.2 mm	177.7 mm

Lifetime

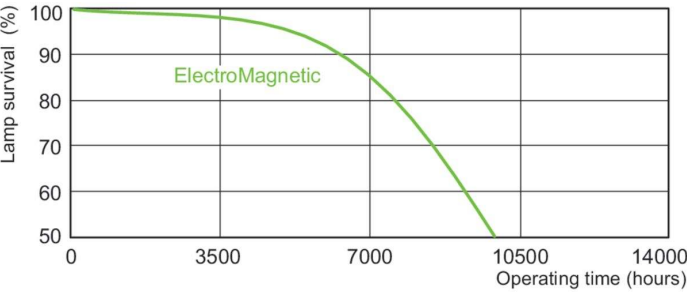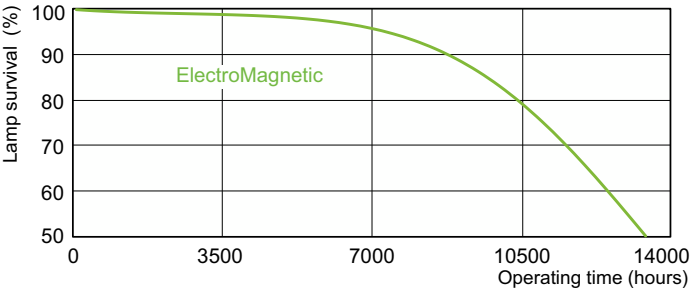

Life Expectancy Diagram - PL-S 13W/850/2P/ALTO/BULK

Life Expectancy Diagram - PL-S 13W/850/2P/ALTO/BULK



Lumen Maintenance Diagram - PL-S 13W/850/2P/ALTO/BULK

## PL-S Short 2-Pin Base

