



# MASTER PL-L Xtra 4 Pin



## MASTER PL-L Xtra 36W/840/4P 1CT/25

MASTER PL-L Xtra is a medium to high-wattage linear compact fluorescent lamp, typically used for general-illumination ceiling luminaires in retail, hospitality and office applications demanding higher lighting levels. MASTER PL-L Xtra lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-L lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as HF electronic gear and is provided with a plug-in/pull-out lamp base.

### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	2G11
Flux measurement reference	Sphere
Life to 50% Failures (Nom)	21,000 hour(s)
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux	2,800 lm


Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.38
Chromaticity Coordinate Y (Nom)	0.38
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	81 lm/W
Color rendering index (CRI)	80

MASTER PL-L Xtra 4 Pin

Operating and Electrical	
Power Consumption	36.3 W
Lamp Current (Nom)	0.435 A
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	3 mg
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	37 kWh
EPREL Registration Number	423277


Product Data	
Order product name	MASTER PL-L Xtra 36W/840/4P 1CT/25
Full product name	MASTER PL-L Xtra 36W/840/4P 1CT/25
Full product code	871150089760240
Order code	927904784014
Material Nr. (12NC)	927904784014
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500897602
Numerator - Packs per outer box	25
EAN/UPC - Case	8711500897619

Dimensional drawing

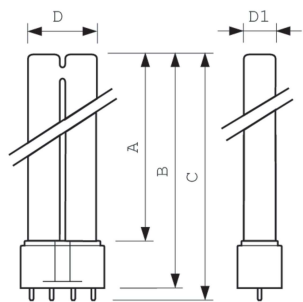

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L Xtra 36W/840/4P 1CT/25	39.0 mm	18.0 mm	384.2 mm	410 mm	416.6 mm

Photometric data

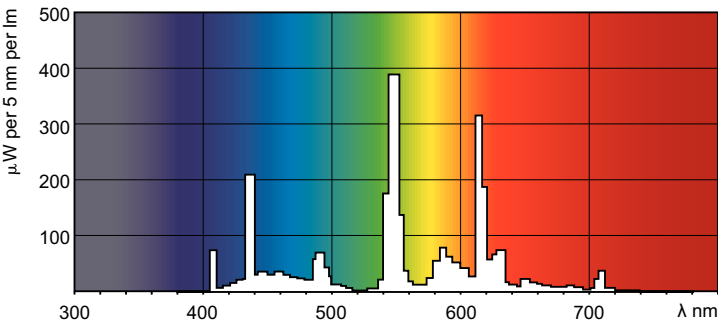

Spectral Power Distribution Colour - MASTER PL-L Xtra 36W/840/4P 1CT/25

## MASTER PL-L Xtra 4 Pin

