



MASTER PL-C 2 Pin

MASTER PL-C 13W/840/2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

Warnings and Safety

- Use only with electromagnetic control gear
- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | Color rendering index (CRI) | |
|------------------------------------|--------------------|-----------------------------|---------|
| Cap-Base | G24d-1 | | 82 |
| Life to 50% Failures (Nom) | 10,000 hour(s) | Operating and Electrical | |
| | | Power Consumption | 13.4 W |
| | | Lamp Current (Nom) | 0.170 A |
| Light Technical | | Controls and Dimming | |
| Color Code | 840 [CCT of 4000K] | Dimmable | No |
| Luminous Flux | 925 lm | | |
| Color Designation | Cool White (CW) | | |
| Correlated Color Temperature (Nom) | 4000 K | | |
| Luminous Efficacy (rated) (Nom) | 69 lm/W | | |

MASTER PL-C 2 Pin

Approval and Application


| | |
|-------------------------------|--------|
| Mercury (Hg) Content (Nom) | 1.4 mg |
| Energy Consumption kWh/1000 h | 17 kWh |

Product Data

| | |
|--------------------|------------------------------------|
| Order product name | MASTER PL-C 13W/840/2P 1CT/5X10BOX |
| Full product name | MASTER PL-C 13W/840/2P 1CT/5X10BOX |
| Full product code | 871150062086600 |


| | |
|---------------------------------|---------------|
| Order code | 927904884002 |
| Material Nr. (12NC) | 927904884002 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8711500620866 |
| Numerator - Packs per outer box | 50 |
| EAN/UPC - Case | 8711500621122 |

Dimensional drawing



| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|--|---------|----------|---------|----------|----------|
| MASTER PL-C 13W/840/2P 1CT/ 5X10BOX | 27.1 mm | 27.1 mm | 97.5 mm | 117.0 mm | 139.4 mm |


Photometric data

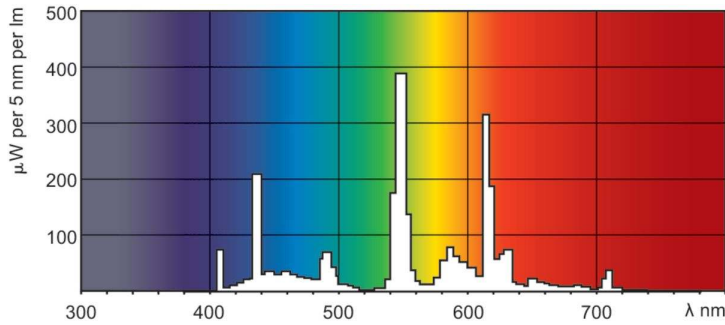

Spectral Power Distribution Colour - MASTER PL-C 13W/840/2P 1CT/5X10BOX

MASTER PL-C 2 Pin

Lifetime

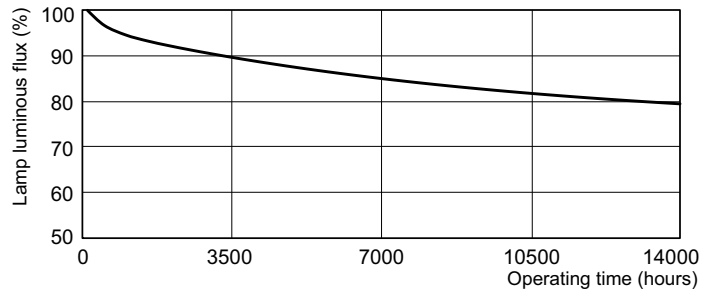

Life Expectancy Diagram - MASTER PL-C 13W/840/2P 1CT/5X10BOX

Lumen Maintenance Diagram - MASTER PL-C 13W/840/2P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-C 13W/840/2P 1CT/5X10BOX

