



# MASTER PL-C 2 Pin

## MASTER PL-C 26W/830 /2P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

### Product data

General Information	
Cap-Base	G24D-3 [ G24d-3]
Life To 10% Failures (Nom)	6500 h
Life to 50% Failures (Nom)	10000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	98 %
LSF 6000 h Rated	92 %
LSF 8000 h Rated	78 %
Light Technical	
Colour Code	830 [ CCT of 3000K]
Luminous Flux (Nom)	1800 lm
Luminous Flux (Rated) (Nom)	1800 lm
Colour Designation	Warm White (WW)
Colour Temperature, horizontal (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	68 lm/W
Colour Rendering Index horiz (Nom)	82
Depreciation 2000 hrs	92 %
LLMF 4000 h Rated	87 %
Depreciation 5000 hrs	83 %
LLMF 8000 h Rated	81 %
Operating and Electrical	
Power (Rated) (Nom)	26.5 W

Lamp Current (Nom)	0.335 A
Temperature	
Design Temperature (Nom)	28 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Cap-Base Information	2P
Approval and Application	
Energy Efficiency Label	B
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	32 kWh
Product Data	
Full product code	871150062098970
Order product name	MASTER PL-C 26W/830/2P 1CT/5X10BOX
EAN/UPC - Product	8711500620989
Order code	62098970
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	50
Material Nr. (12NC)	927906183040
Net Weight (Piece)	64.300 g

# MASTER PL-C 2 Pin


ILCOS Code

FSQ-26/30/1B-I-G24d-3

## Warnings and Safety

- Use only with electromagnetic control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position
- Dimming is not possible
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 26W/830/2P 1CT/5X10BOX	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm

PL-C 26W/830/2P

## Photometric data

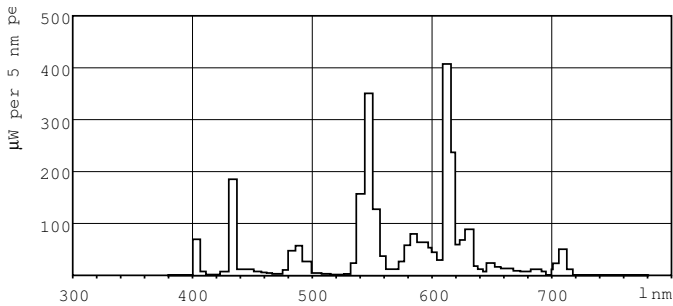


Lightcolour /830

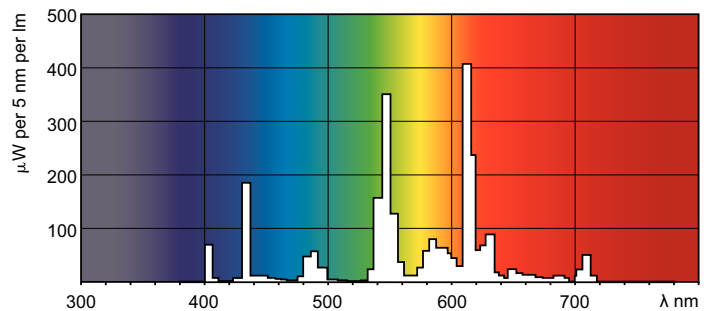


Lightcolour /830

# MASTER PL-C 2 Pin

## Lifetime

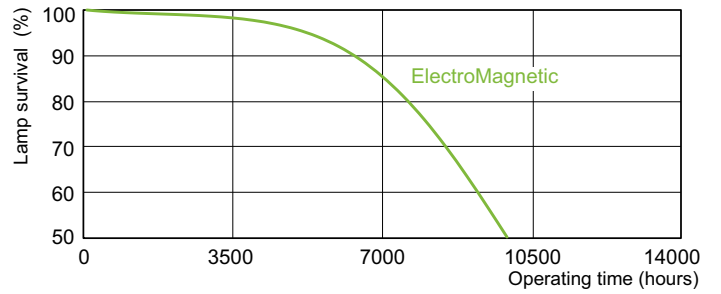

### Life Expectancy 3 h cycle

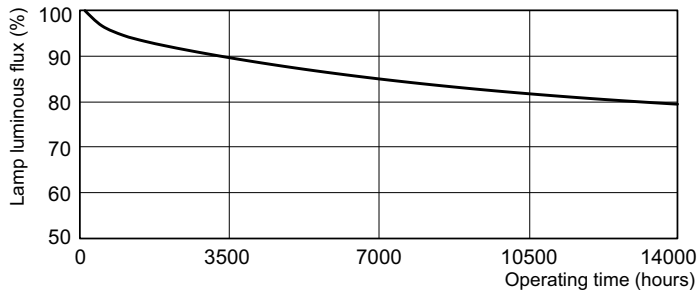

### Life Expectancy 12 h cycle

### Lumen Maintenance 3h + 12 h cycle

