



PL-C Cluster 2-Pin Base

PL-C 26W/835/2P/ALTO 10PK

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

Product data

General Information		LLMF 6000 h Rated		LLMF 8000 h Rated	
Base	G24D-3 [G24d-3]		83 %		81 %
Life To 10% Failures (Nom)	6500 h				
Life to 50% Failures (Nom)	10000 h				
LSF 2000 h Rated	99 %	Operating and Electrical			
LSF 4000 h Rated	98 %	Power (Rated) (Nom)	26.5 W		
LSF 6000 h Rated	92 %	Lamp Current (Nom)	0.335 A		
LSF 8000 h Rated	78 %	Temperature			
		Design Temperature (Nom)	28 °C		
Light Technical		Controls and Dimming			
Color Code	835 [CCT of 3500K]	Dimmable	No		
Initial lumen (Nom)	1800 lm	Mechanical and Housing			
Luminous Flux (Rated) (Nom)	1800 lm	Cap-Base Information	2P		
Color Designation	White (WH)	Approval and Application			
Correlated Color Temperature (Nom)	3500 K	Energy Efficiency Label (EEL)	B		
Luminous Efficacy (rated) (Nom)	68 lm/W	Mercury (Hg) Content (Nom)	1.4 mg		
Color Rendering Index (Nom)	82				
LLMF 2000 h Rated	92 %				
LLMF 4000 h Rated	87 %				

PL-C Cluster 2-Pin Base


Energy Consumption kWh/1000 h	32 kWh
Product Data	
Order product name	PL-C 26W/835/2P/ALTO 10PK
EAN/UPC - Product	046677111649
Order code	383232

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	927906183530
Net Weight (Piece)	64.300 g

Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Dimensional drawing




PL-C 26W/835/2P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-C 26W/835/2P/ALTO 10PK	27.1 mm	27.1 mm	130.5 mm	149.0 mm	171.4 mm

Photometric data

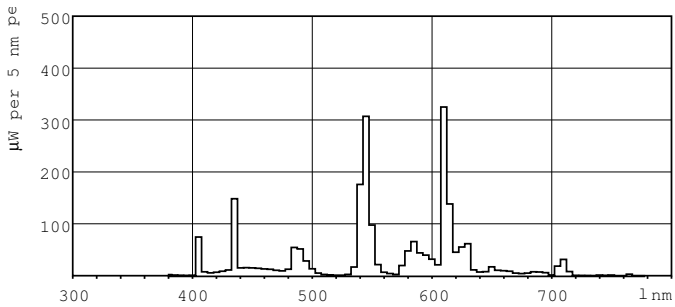


Lightcolor /835

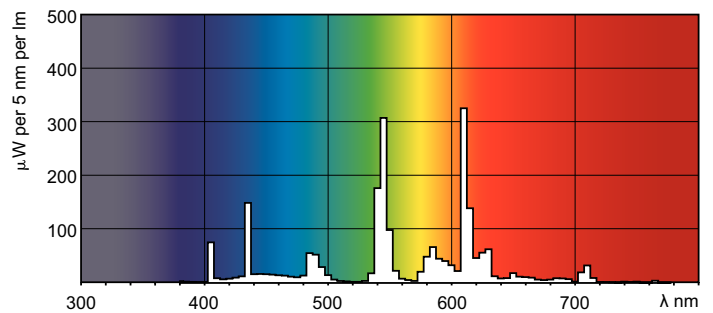


Lightcolor /835

PL-C Cluster 2-Pin Base

Lifetime

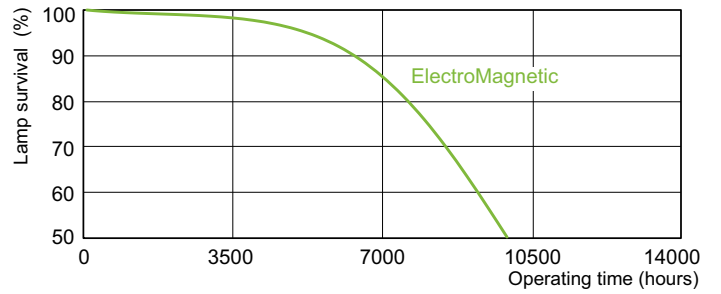

Life Expectancy 3 h cycle

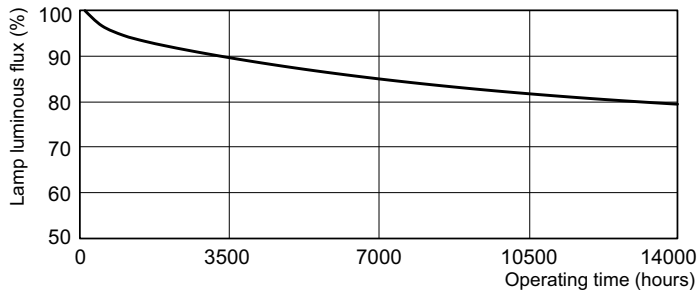

Life Expectancy 12 h cycle

Lumen Maintenance 3h + 12 h cycle

