



MASTER PL-C Xtra 4 Pin

MASTER PL-C Xtra 26W/840/4P 1CT/5X10CC

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Product data

General Information		LLMF 12000 h Rated		81 %	
Cap base	G24Q-3 [G24q-3]	LLMF 16000 h Rated	79 %		
Life to 50% failures preheat (nom.)	33000 h	LLMF 20000 h Rated	78 %		
LSF Preheat 2000 h Rated	99 %	Operating and Electrical			
LSF Preheat 4000 h Rated	98 %	Power (Rated) (Nom)	26.0 W		
LSF Preheat 6000 h Rated	97 %	Lamp current (nom.)	0.300 A		
LSF Preheat 8000 h Rated	96 %	Temperature			
LSF Preheat 16000 h Rated	94 %	Design temperature (nom.)	28 °C		
LSF Preheat 20000 h Rated	90 %	Controls and Dimming			
Light Technical		Dimmable	yes		
Colour code	840 [CCT of 4,000 K]	Mechanical and Housing			
Luminous flux (nom.)	1800 lm	Cap base information	4P		
Luminous flux (rated) (nom.)	1800 lm	Approval and Application			
Colour designation	Cool White (CW)	Energy efficiency label (EEL)	A		
Correlated colour temperature (nom.)	4000 K	Mercury (Hg) content (nom.)	3.0 mg		
Luminous efficacy (rated) (nom.)	75 lm/W	Energy Consumption kWh/1000 h	29 kWh		
Color rendering index (nom.)	82				
LLMF 2000 h Rated	92 %				
LLMF 4000 h Rated	88 %				
LLMF 6000 h Rated	86 %				
LLMF 8000 h Rated	84 %				

MASTER PL-C Xtra 4 Pin


Product Data	
Full product code	871150089892070
Order product name	MASTER PL-C Xtra 26W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500898920
Order code	89892070
Local Code	26PLC8404PXTRA
Numerator – quantity per pack	1

Numerator – packs per outer box	50
Material no. (12NC)	927906384014
Net weight (piece)	60.400 g
ILCOS Code	FSQ-26/40/1B-E-G24q=3

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-C Xtra 26W/840/4P

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C Xtra 26W/ 840/4P 1CT/5X10BOX	27.1 mm	27.1 mm	130.7 mm	149.0 mm	163.9 mm

Photometric data

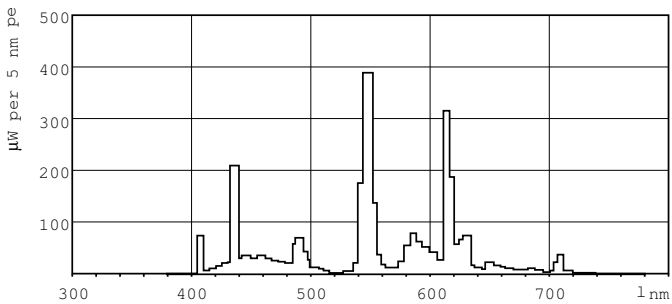

Lightcolour /840

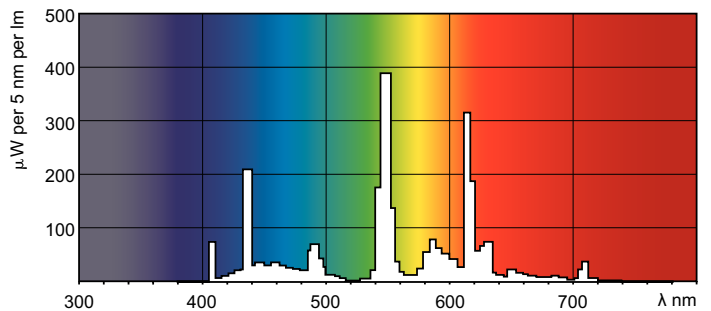

Lightcolour /840

MASTER PL-C Xtra 4 Pin

Lifetime

