



# MASTER PL-C 4 Pin

## MASTER PL-C 13W/830/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps. Compact long-arc low-pressure mercury discharge lamp. Envelope consists of 4 parallel narrow fluorescent tubes

### Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information		Luminous Efficacy (rated) (Nom)		72 lm/W	
Cap-Base	G24Q-1 [G24q-1]	Color rendering index (CRI)		82	
Flux measurement reference	Sphere				
Light Technical		Operating and Electrical			
Color Code	830 [CCT of 3000K]	Power Consumption	13.8 W		
Luminous Flux	925 lm	Lamp Current (Nom)	0.170 A		
Color Designation	Warm White (WW)	Controls and Dimming			
Chromaticity Coordinate X (Nom)	0.44	Dimmable	Yes		
Chromaticity Coordinate Y (Nom)	0.403				
Correlated Color Temperature (Nom)	3000 K				

# MASTER PL-C 4 Pin

## Approval and Application


Energy Efficiency Class	G
Mercury (Hg) Content (Max)	1.4 mg
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	14 kWh
EPREL Registration Number	423299

## Product Data

Order product name	MASTER PL-C 13W/830/4P 1CT/5X10BOX
Full product name	MASTER PL-C 13W/830/4P 1CT/5X10BOX


Full product code	871150062331770
Order code	927907183040
Material Nr. (12NC)	927907183040
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500623317
Numerator - Packs per outer box	50
EAN/UPC - Case	8711500715722

## Dimensional drawing

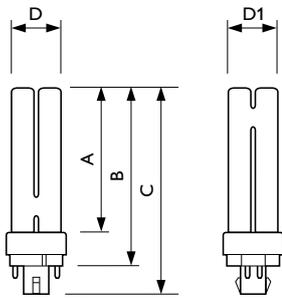

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/830/4P 1CT/ 5X10BOX	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm



## Photometric data

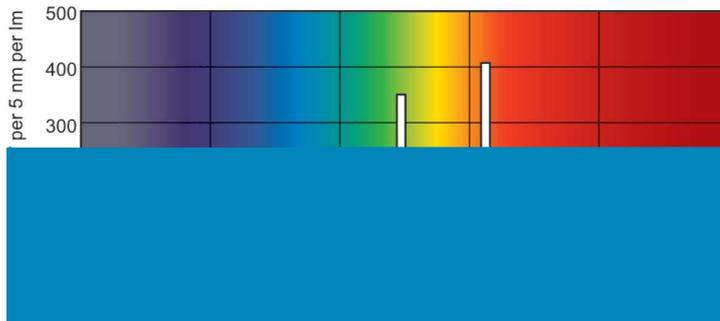

Spectral Power Distribution Colour - MASTER PL-C 13W/830/4P 1CT/5X10BOX

# MASTER PL-C 4 Pin

## Lifetime

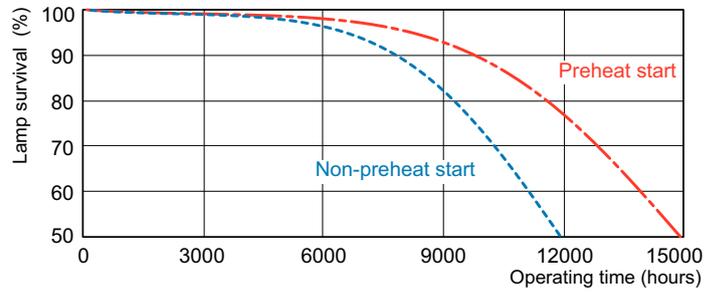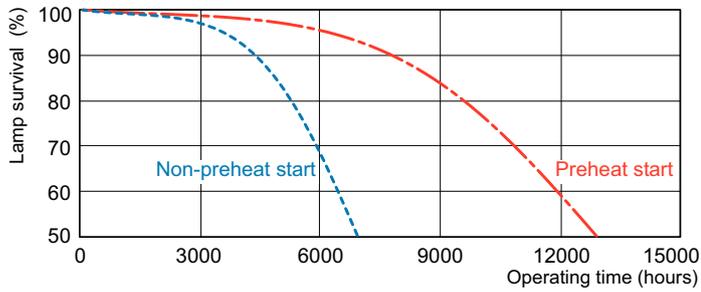

Life Expectancy Diagram - MASTER PL-C 13W/830/4P 1CT/5X10BOX

Life Expectancy Diagram - MASTER PL-C 13W/830/4P 1CT/5X10BOX



Lumen Maintenance Diagram - MASTER PL-C 13W/830/4P 1CT/5X10BOX

