PHILIPS Lighting



MASTER PL-C 4 Pin

MASTER PL-C 13W/840/4P 1CT/5X10BOX

MASTER PL-C is an efficient medium-wattage compact fluorescent lamp, typically used in general downlights for retail, hospitality and office applications. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. The 4-pin version is designed for operation on electronic HF control gear with integrated pre-heat and is provided with a plug-in/pull-out lamp base.

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- · Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Lamp Current (Nom)	0.170 A		
Cap-Base	G24q-1				
		Controls and Dimming			
Light Technical		Dimmable	Yes		
Color Code	840 [CCT of 4000K]				
Luminous Flux	925 lm	Approval and Application			
Color Designation	Cool White (CW)	Mercury (Hg) Content (Nom)	1.4 mg		
Correlated Color Temperature (Nom)	4000 K	Energy Consumption kWh/1000 h	15 kWh		
Luminous Efficacy (rated) (Nom)	69 lm/W				
Color rendering index (CRI)	82	Product Data			
		Order product name	MASTER PL-C 13W/840/4P 1CT/5X10BOX		
Operating and Electrical		Full product name	MASTER PL-C 13W/840/4P 1CT/5X10BOX		
Power Consumption	13.0 W	Full product code	871150062332400		

MASTER PL-C 4 Pin

Order code	927907184002		
Material Nr. (12NC)	927907184002		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8711500623324		


Numerator - Packs per outer box	50
EAN/UPC - Case	8711500715739

Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-C 13W/840/4P 1CT/	27.1 mm	27.1 mm	97.5 mm	117.0 mm	131.9 mm
5X10BOX					

Photometric data

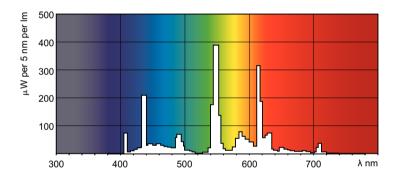


Spectral Power Distribution Colour - MASTER PL-C 13W/840/4P 1CT/5X10BOX

Lifetime

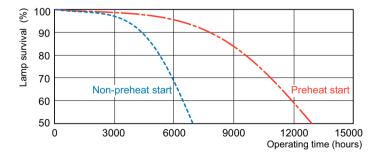


Life Expectancy Diagram - MASTER PL-C 13W/840/4P 1CT/5X10BOX

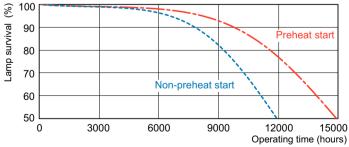

Life Expectancy Diagram - MASTER PL-C 13W/840/4P 1CT/5X10BOX

MASTER PL-C 4 Pin

Lifetime

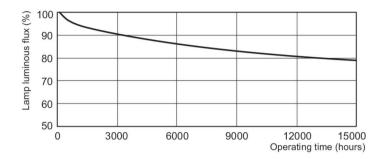

Lumen Maintenance Diagram - MASTER PL-C 13W/840/4P 1CT/5X10BOX



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, March 15 - data subject to change