



MASTER PL-C 4 Pin

MASTER PL-C 26W/840/4P 1CT/5X10BOX

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 4 parallel narrow fluorescent tubes

Product data

| General Information | |
|--------------------------------------|-----------------------|
| Cap base | G24Q-3 [G24q-3] |
| Life to 50% failures preheat (nom.) | 13000 h |
| LSF Preheat 2000 h Rated | 99 % |
| LSF Preheat 4000 h Rated | 98 % |
| LSF Preheat 6000 h Rated | 97 % |
| LSF Preheat 8000 h Rated | 90 % |
| Light Technical | |
| Colour Code | 840 [CCT of 4,000 K] |
| Lamp Luminous Flux 25°C EL (Nom) | 1800 lm |
| Lamp Luminous Flux (Nom) | 1800 lm |
| Colour Designation | Cool White (CW) |
| Colour Temperature, horizontal (Nom) | 4000 K |
| Lamp Luminous Efficacy EM (Nom) | 67 lm/W |
| Colour Rendering Index, horiz (Nom) | 82 |
| LLMF 2000 h Rated | 92 % |
| LLMF 4000 h Rated | 87 % |
| LLMF 6000 h Rated | 83 % |
| LLMF 8000 h Rated | 81 % |
| Operating and Electrical | |
| Power (Rated) (Nom) | 26.0 W |
| Lamp current (nom.) | 0.335 A |


| Temperature | |
|---------------------------------|------------------------------------|
| Design temperature (nom.) | 28 °C |
| Controls and Dimming | |
| Dimmable | yes |
| Mechanical and Housing | |
| Cap base information | 4P |
| Approval and Application | |
| Energy efficiency label (EEL) | A |
| Mercury (Hg) content (nom.) | 1.4 mg |
| Energy Consumption kWh/1000 h | 29 kWh |
| Product Data | |
| Full product code | 871150062336270 |
| Order product name | MASTER PL-C 26W/840/4P 1CT/5X10BOX |
| EAN/UPC – product | 8711500623362 |
| Order code | 62336270 |
| Numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 50 |
| Material no. (12NC) | 927907384040 |
| Net weight (piece) | 60.400 g |
| ILCOS Code | FSQ-26/40/1B-E-G24q=3 |

MASTER PL-C 4 Pin

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




| Product | D (max) | D1 (max) | A (max) | B (max) | C (max) |
|---------------------------------------|---------|----------|----------|----------|----------|
| MASTER PL-C 26W/840/4P 1CT/5X10BOX | 27.1 mm | 27.1 mm | 130.5 mm | 149.0 mm | 163.9 mm |

PL-C 26W/840/4P

Photometric data

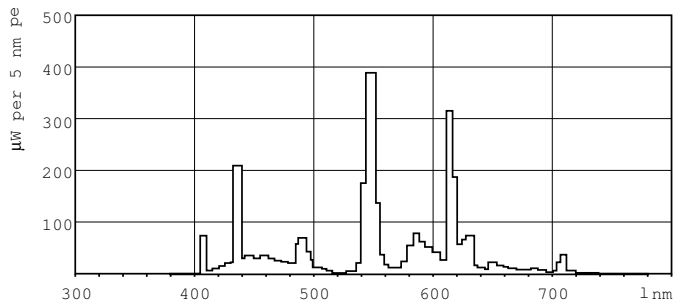

Lightcolour /840

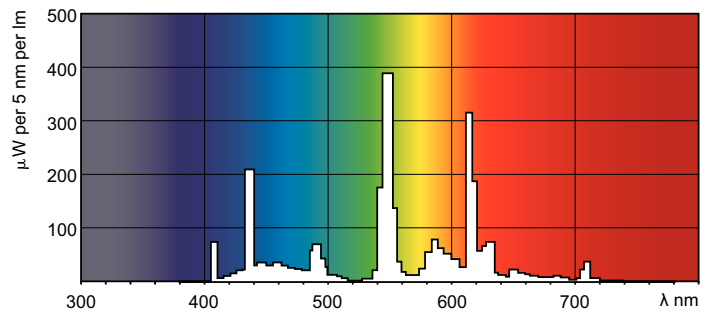

Lightcolour /840

MASTER PL-C 4 Pin

Lifetime

