



MASTER PL-L Xtra Polar 4 Pin

MASTER PL-L XTRA POLAR 36W/830/4P 1CT/25

MASTER PL-L Xtra Polar is a medium to high-wattage linear compact fluorescent lamp, typically used for lower-temperature applications such as outdoor lighting and cold storage. MASTER PL-L Xtra Polar lamps furthermore provide significantly lower operating costs thanks to their lifetime, which is more than double that of a standard MASTER PL-L lamp, and their very low early failure rate. The original Philips-invented bridge technology guarantees optimum performance in the application, enabling more light and higher efficacy than the bended technology. It is designed for operation on electromagnetic as well as HF electronic gear and is provided with a plug-in/pull-out lamp base.

Product data

General Information	
Cap base	2G11 [2G11]
Life to 10% failures (nom.)	14000 h
Life to 50% failures (nom.)	21000 h
Life to 50% failures preheat (nom.)	36000 h
System description	na [-]
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	98 %
LSF 8000 h Rated	97 %
LSF 12000 h Rated	95 %
LSF 16000 h Rated	88 %
LSF 20000 h Rated	58 %
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %

LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	94 %
Light Technical	
Colour code	830 [CCT of 3,000 K]
Luminous flux (nom.)	2900 lm
Luminous flux (rated) (nom.)	2900 lm
Colour designation	Warm white (WW)
Correlated colour temperature (nom.)	3000 K
Luminous efficacy (rated) (nom.)	81 lm/W
Color rendering index (nom.)	>80
LLMF 2000 h Rated	94 %
LLMF 4000 h Rated	93 %
LLMF 6000 h Rated	92 %
LLMF 8000 h Rated	91 %

MASTER PL-L Xtra Polar 4 Pin


LLMF 12000 h Rated	90 %
LLMF 16000 h Rated	89 %
LLMF 20000 h Rated	88 %
Operating and Electrical	
Power (Rated) (Nom)	36.0 W
Lamp current (nom.)	0.445 A
Temperature	
Design temperature (nom.)	18 °C
Controls and Dimming	
Dimmable	yes
Mechanical and Housing	
Cap base information	4P
Approval and Application	
Energy efficiency label (EEL)	A

Mercury (Hg) content (nom.)	3.0 mg
Energy Consumption kWh/1000 h	40 kWh
Product Data	
Full product code	871150026776440
Order product name	MASTER PL-L XTRA POLAR 36W/830/4P 1CT/25
EAN/UPC – product	8711500267764
Order code	26776440
Local Code	36PLL830XTRAPOL
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927907783015
Net weight (piece)	104.000 g
ILCOS Code	FSD-36/30/1B-E-2G11

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing




PL-L Xtra 36W/830/4P LT

Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-L XTRA POLAR 36W/830/4P 1CT/25	39.0 mm	18.0 mm	384.2 mm	410 mm	416.6 mm

MASTER PL-L Xtra Polar 4 Pin

Photometric data

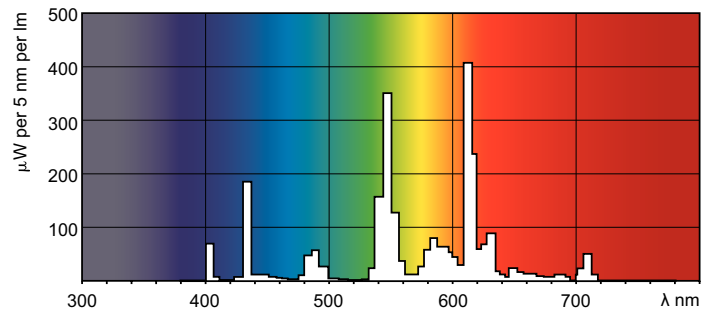

Lightcolour /830

Lightcolour /830

