

# **PL-L Long 4-Pin Base**

## PL-L 40W/841/4P/RS/IS 1CT/25

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum effciency and sleek design solutions are required.

#### **Product data**


General Information			
Cap-Base	2G11 [2G11]		
Life to 50% Failures (Nom)	10,000 hour(s)		
Light Technical			
Color Code	841 [CCT of 4100K]		
Luminous Flux	3,500 lm		
Color Designation	Cool White (CW)		
Correlated Color Temperature (Nom)	4100 K		
Luminous Efficacy (rated) (Nom)	87 lm/W		
Color rendering index (CRI)	82		
Operating and Electrical			
Power Consumption	36.3 W		
Lamp Current (Nom)	0.320 A		
Voltage (Nom)	126 V		

126 V			
Yes			
PL-L 40W/841/4P/RS/IS 1CT/25			
PL-L 40W/841/4P/RS/IS 1CT/25			
927908008429			
927908008429			
1			
046677111809			
25			

Datasheet, 2023, April 15 data subject to change


## PL-L Long 4-Pin Base

### Dimensional drawing



Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
PL-L 40W/841/4P/RS/IS 1CT/25	39 mm	18 mm	540 mm	565 mm	571.6 mm

#### Photometric data

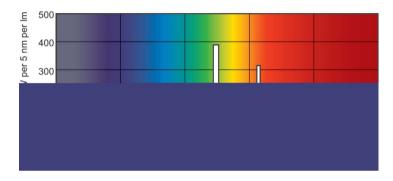

Spectral Power Distribution Colour - PL-L 40W/841/4P/RS/IS 1CT/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.