



# PL-T Triple 4-Pin Base

## PL-T 32W/835/A/4P/ALTO 1BL/6

Philips Linear Compact Fluorescent Lamps offer designers, specifiers and end-users new levels of efficiencies and versatility in sizes, configurations and application possibilities. With so many elegant fixtures available to complement their small size, high light output and advanced technology, Philips Energy Advantage lamps are fast becoming the preferred choice when maximum efficiency and sleek design solutions are required.

### Product data

General Information	
Cap-Base	GX24Q-3 [GX24q-3]
Light Technical	
Color Code	835 [CCT of 3500K]
Luminous Flux	2,250 lumen
Color Designation	White (WH)
Correlated Color Temperature (Nom)	3500 K
Luminous Efficacy (rated) (Nom)	68.2 lm/W
Color rendering index (CRI)	82
Operating and Electrical	
Power Consumption	33.0 W
Lamp Current (Nom)	0.320 A
Controls and Dimming	
Dimmable	Yes


Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Product Data	
Order product name	PL-T 32W/835/A/4P/ALTO 1BL/6
Order code	927911083502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	927911083502
Full product name	PL-T 32W/835/A/4P/ALTO 1BL/6
EAN/UPC - Case	50046677465921
EAN/UPC - Product/Case	046677465926

PL-T Triple 4-Pin Base

Dimensional drawing


Product	D (max)	A (max)	B (max)	C (max)
PL-T 32W/835/A/4P/ALTO 1BL/6	41 mm	98.7 mm	123.0 mm	138.7 mm

Photometric data

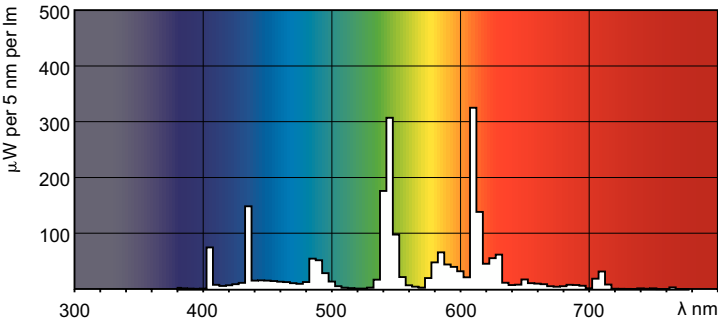


Spectral Power Distribution Colour - PL-T 32W/835/A/4P/ALTO 1BL/6

Lifetime

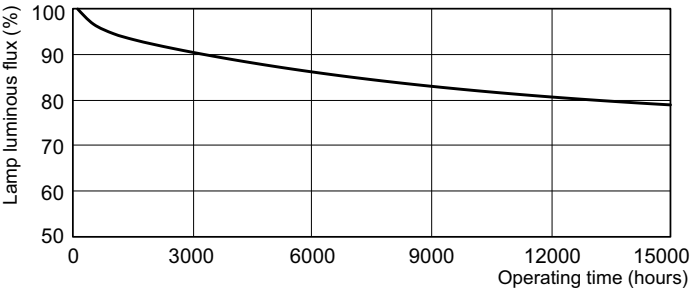


Lumen Maintenance Diagram - PL-T 32W/835/A/4P/ALTO 1BL/6

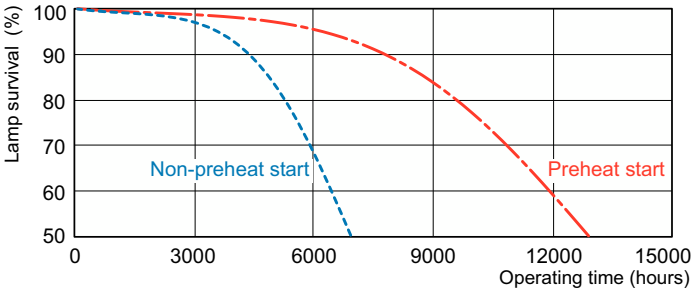

Life Expectancy Diagram - PL-T 32W/835/A/4P/ALTO 1BL/6

PL-T Triple 4-Pin Base

Lifetime

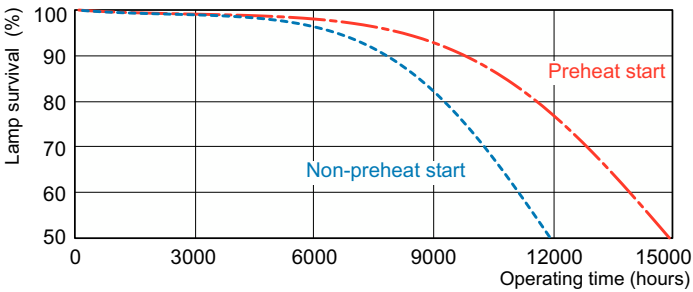

Life Expectancy Diagram - PL-T 32W/835/A/4P/ALTO 1BL/6

