



MASTER PL-T TOP 4 Pin

MASTER PL-T TOP 26W/840/4P 1CT/5X10BOX

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes Amalgam controlled operation

Product data

| General Information | |
|--------------------------------------|-----------------------|
| Cap base | GX24Q-3 [GX24q-3] |
| Life to 50% failures preheat (nom.) | 13000 h |
| LSF Preheat 2000 h Rated | 99 % |
| LSF Preheat 4000 h Rated | 98 % |
| LSF Preheat 6000 h Rated | 97 % |
| LSF Preheat 8000 h Rated | 90 % |
| Light Technical | |
| Colour code | 840 [CCT of 4,000 K] |
| Luminous flux (nom.) | 1800 lm |
| Luminous flux (rated) (nom.) | 1725 lm |
| Colour designation | Cool White (CW) |
| Correlated colour temperature (nom.) | 4000 K |
| Luminous efficacy (rated) (min.) | 66 lm/W |
| Color rendering index (nom.) | 82 |
| LLMF 2000 h Rated | 92 % |
| LLMF 4000 h Rated | 88 % |
| LLMF 6000 h Rated | 85 % |
| LLMF 8000 h Rated | 84 % |

| LLMF 12000 h Rated | 81 % |
|-------------------------------|---------|
| Operating and Electrical | |
| Power (Rated) (Nom) | 26.0 W |
| Lamp current (nom.) | 0.335 A |
| Temperature | |
| Design temperature (nom.) | 28 °C |
| Controls and Dimming | |
| Dimmable | yes |
| Mechanical and Housing | |
| Cap base information | 4P |
| Approval and Application | |
| Energy efficiency label (EEL) | A |
| Mercury (Hg) content (nom.) | 1.4 mg |
| Energy Consumption kWh/1000 h | 30 kWh |

MASTER PL-T TOP 4 Pin


| Product Data | |
|-------------------------------|--|
| Full product code | 871150088947870 |
| Order product name | MASTER PL-T TOP 26W/840/4P 1CT/5X10BOX |
| EAN/UPC – product | 8711500889478 |
| Order code | 88947870 |
| Local Code | 26PLT8404PINTOP |
| Numerator – quantity per pack | 1 |

| | |
|---------------------------------|------------------------|
| Numerator – packs per outer box | 50 |
| Material no. (12NC) | 927911384069 |
| Net weight (piece) | 64.000 g |
| ILCOS Code | FSM-26/40/1B-E-GX24q=3 |

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-T TOP 26W/840/4P A

| Product | D (max) | A (max) | B (max) | C (max) |
|--|---------|---------|----------|----------|
| MASTER PL-T TOP 26W/840/4P 1CT/5X10BOX | 41 mm | 86.7 mm | 111.0 mm | 126.7 mm |

Photometric data

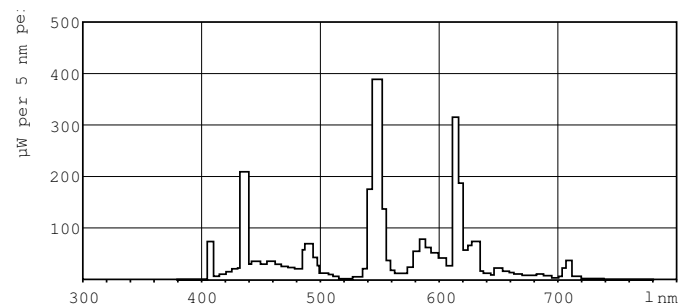

Lightcolour /840

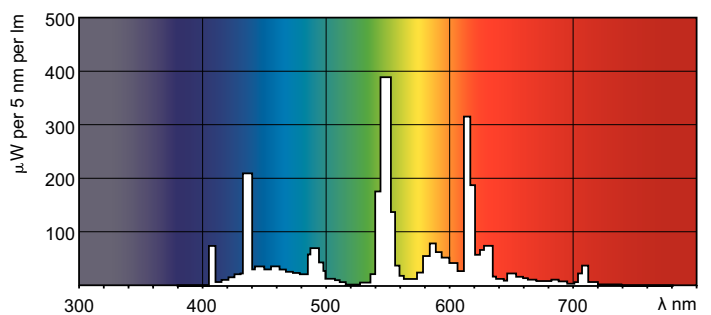

Lightcolour /840

MASTER PL-T TOP 4 Pin

Lifetime

