



MASTER PL-T TOP 4 Pin

MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX

Energy saving compact fluorescent lamp Compact long-arc low-pressure mercury discharge lamp Envelope consists of 6 parallel narrow fluorescent tubes Amalgam controlled operation

Product data

General Information		LLMF 12000 h Rated	
Cap base	GX24Q-5 [GX24q-5]		81 %
Life to 50% failures preheat (nom.)	13000 h	Operating and Electrical	
LSF Preheat 2000 h Rated	99 %	Power (Rated) (Nom)	57 W
LSF Preheat 4000 h Rated	98 %	Lamp current (nom.)	0.320 A
LSF Preheat 6000 h Rated	97 %	Temperature	
LSF Preheat 8000 h Rated	90 %	Design temperature (nom.)	28 °C
Light Technical		Controls and Dimming	
Colour Code	840 [CCT of 4,000 K]	Dimmable	yes
Lamp Luminous Flux 25°C EL (Nom)	4300 lm	Mechanical and Housing	
Lamp Luminous Flux (Nom)	3900 lm	Cap base information	4P
Colour Designation	Cool White (CW)	Approval and Application	
Colour Temperature, horizontal (Nom)	4000 K	Energy efficiency label (EEL)	A
Lamp Luminous Efficacy EM (Min)	76 lm/W	Mercury (Hg) content (nom.)	1.4 mg
Colour Rendering Index, horiz (Nom)	82	Energy Consumption kWh/1000 h	56 kWh
LLMF 2000 h Rated	92 %		
LLMF 4000 h Rated	88 %		
LLMF 6000 h Rated	85 %		
LLMF 8000 h Rated	84 %		

MASTER PL-T TOP 4 Pin


Product Data	
Full product code	871150061034870
Order product name	MASTER PL-T TOP 57W/840/4P 1CT/5X10BOX
EAN/UPC – product	8711500610348
Order code	927912484069
Local Code	PLTT57W8404PA
Numerator – quantity per pack	1

Numerator – packs per outer box	50
Material no. (12NC)	927912484069
Net weight (piece)	101.000 g
ILCOS Code	FSM6H-57/40/1B-L/P-GX24q=5

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




PL-T TOP 57W/840/4P A

Product	D (max)	A (max)	B (max)	C (max)
MASTER PL-T TOP 57W/840/4P 1CT/ 5X10BOX	41 mm	157.7 mm	182.0 mm	197.7 mm

Photometric data

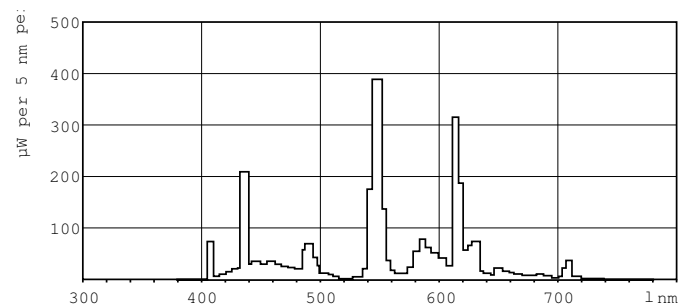

Lightcolour /840

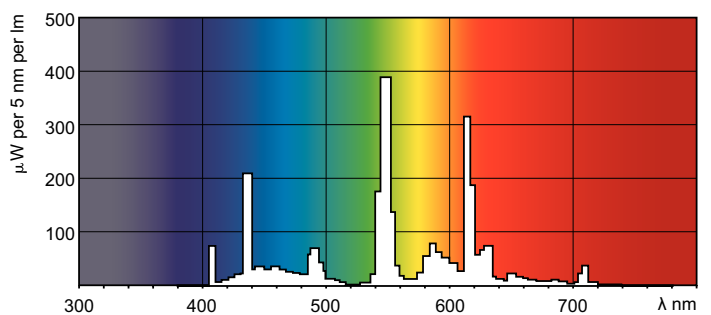

Lightcolour /840

MASTER PL-T TOP 4 Pin

Lifetime

