

# **MASTER TL-D Secura**

# MASTER TL-D Secura 18W/840 1SL/25

This TL-D lamp has a protective coating that keeps glass and lamp components together in the event of accidental breakage. The lamp is easily identifiable by blue rings at one end. Application areas are all places where glass shatters can disturb operations and can have an impact on product and people safety, e.g. the food and beverage industry. The lamp has a Surlyn coating which blocks UV light. It is compliant with HACCP regulations.

#### **Warnings and Safety**

- · Not suitable for closed luminaires (as indicated by two blue rings)
- Recommended use in combination with self-stopping lamp control system
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- It's strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.

#### Product data

General Information				
Cap-Base	G13 [Medium Bi-Pin Fluorescent]			
Flux measurement reference	Sphere			
Life to 50% Failures (Nom)	15,000 hour(s)			
Light Technical				
Color Code	840 [CCT of 4000K]			
Luminous Flux	1,300 lm			
Color Designation	Cool White (CW)			
Chromaticity Coordinate X (Nom)	0.38			
Chromaticity Coordinate Y (Nom)	0.38			
Correlated Color Temperature (Nom)	4000 K			

Luminous Efficacy (rated) (Nom)	72 lm/W
Color rendering index (CRI)	80
Operating and Electrical	
Power Consumption	18.2 W
Lamp Current (Nom)	0.360 A
Controls and Dimming	
Dimmable	Yes


Datasheet, 2023, May 8 data subject to change

## **MASTER TL-D Secura**

Mechanical and Housing					
Bulb Shape	Т8				
Approval and Application					
Energy Efficiency Class	G				
Mercury (Hg) Content (Nom)	1.7 mg				
Energy Consumption kWh/1000 h	19 kWh				
EPREL Registration Number	423368				
Product Data					
Order product name	MASTER TL-D Secura 18W/840 SLV/25				


Full product name	MASTER TL-D Secura 18W/840 1SL/25
Full product code	871150064010940
Order code	64010940
Material Nr. (12NC)	927920484076
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500640109
Numerator - Packs per outer box	25
EAN/UPC - Case	8711500640116

## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Secura 18W/840	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm
SLV/25					


## Photometric data

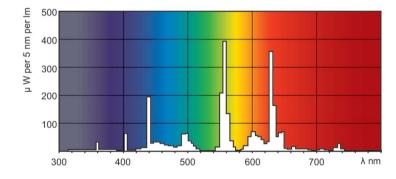


Spectral Power Distribution Colour - MASTER TL-D Secura 18W/840 SLV/25


## **MASTER TL-D Secura**


#### Lifetime

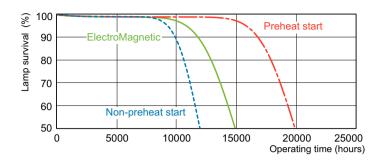



Life Expectancy Diagram - MASTER TL-D Secura 18W/840 SLV/25



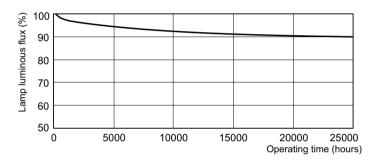

Lumen Maintenance Diagram - MASTER TL-D Secura 18W/840 SLV/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.