



MASTER TL-D Secura

MASTER TL-D Secura 18W/840 SLV/25

This TL-D lamp has a protective coating that keeps glass and lamp components together in the event of accidental breakage. The lamp is easily identifiable by a blue ring at one end. Application areas are all places where glass shatters can disturb operations and can have an impact on product and people safety, e.g. the food and beverage industry. The lamp has a Teflon coating. It is compliant with HACCP regulations.

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %
Light Technical	
Color Code	840 [CCT of 4000K]
Luminous Flux (Nom)	1300 lm
Luminous Flux (Rated) (Nom)	1300 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	72 lm/W
Color Rendering Index (Nom)	85

LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %
Operating and Electrical	
Power (Rated) (Nom)	18 W
Lamp Current (Nom)	0.360 A
Temperature	
Design Temperature (Nom)	25 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label (EEL)	A
Mercury (Hg) Content (Nom)	2.0 mg

MASTER TL-D Secura


Energy Consumption kWh/1000 h	22 kWh
UV	
Damage Factor D/fc (Nom)	0.13
Product Data	
Full product code	871150064010940
Order product name	MASTER TL-D Secura 18W/840 SLV/25
EAN/UPC - Product	8711500640109

Order code	927920484076
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927920484076
Net Weight (Piece)	84.000 g
ILCOS Code	FD-18/40/1B-E-G13

Warnings and Safety

- Not suitable for closed luminaires (as indicated by two blue rings)
- Recommended use in combination with self-stopping lamp control system
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- In order to ensure the integrity of the coating, it is strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Secura 18W/840 SLV/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

TL-D 18W/840 Secura

Photometric data

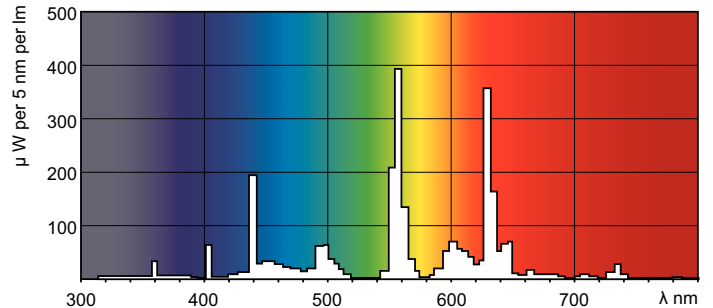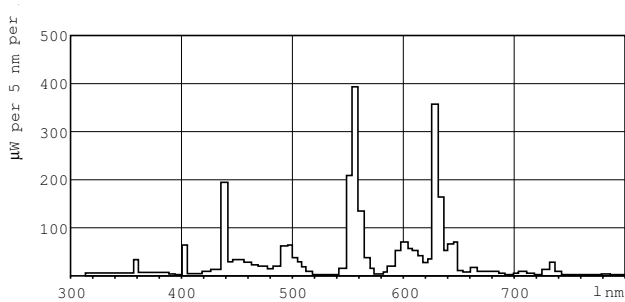


Lightcolor Secura /840

Lightcolor Secura /840


MASTER TL-D Secura

Lifetime

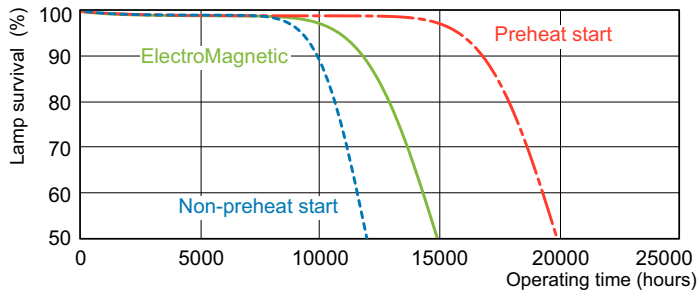

MASTER TL-D Secura Life Expectancy 3 h cycle

MASTER TL-D Secura Life Expectancy 12 h cycle

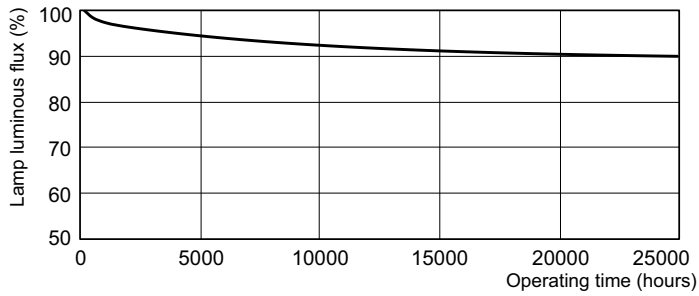

MASTER TL-D Secura Lumen Maintenance 3 h + 12 h cycle

