



MASTER TL-D Super 80

MASTER TL-D Super 80 30W/840 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Colour designation	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Colour designation	Cool White (CW)
Life to 10% failures (nom.)	12000 h	Correlated Colour Temperature (Nom)	4000 K
Life to 50% failures (nom.)	15000 h	Luminous efficacy (rated) (nom.)	80 lm/W
Life to 50% failures preheat (nom.)	20000 h	Colour rendering index (nom.)	>80
LSF 2000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF 4000 h Rated	99 %	LLMF 4000 h Rated	95 %
LSF 6000 h Rated	99 %	LLMF 6000 h Rated	94 %
LSF 8000 h Rated	99 %	LLMF 8000 h Rated	93 %
LSF 12000 h Rated	89 %	LLMF 12000 h Rated	92 %
LSF 16000 h Rated	33 %	LLMF 16000 h Rated	91 %
LSF 20000 h Rated	2 %	LLMF 20000 h Rated	90 %
Light Technical		Operating and Electrical	
Colour Code	841 [CCT of 4100K (841)]	Power (Rated) (Nom)	30.0 W
Luminous flux (nom.)	2400 lm	Lamp current (nom.)	0.360 A
Luminous flux (rated) (nom.)	2400 lm		

MASTER TL-D Super 80

Temperature	
Design temperature (nom.)	25 °C
Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Energy consumption kWh/1,000 hours	36 kWh
Product Data	
Full product code	871150063186240

Order product name	MASTER TL-D Super 80 30W/840 1SL/25
EAN/UPC – product	8711500631862
Order code	63186240
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25
SAP material	927920584023
SAP net weight (piece)	103.600 g
ILCOS code	FD-30/40/1B-E-G13


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 30W/840 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

TL-D 30W/840

Photometric data

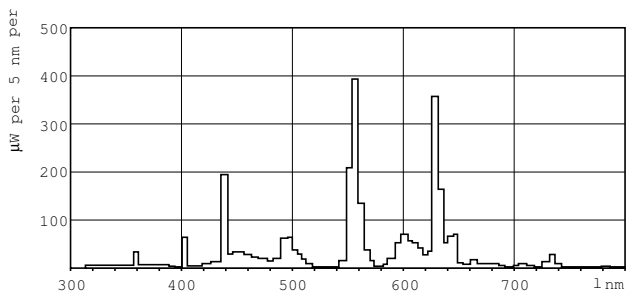

LDPB_TL-D8_840_0001-Spectral power distribution B/W

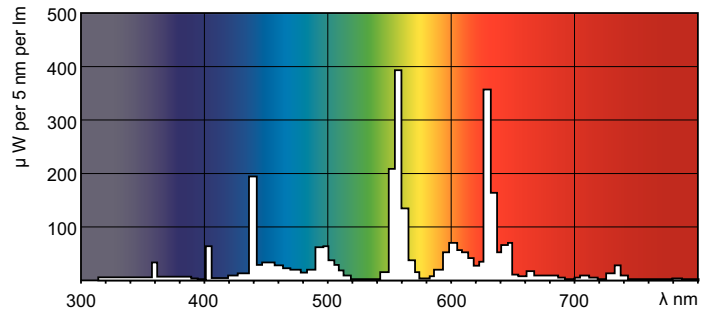

Lightcolour /840

MASTER TL-D Super 80

Lifetime



LDLE_TL-D8_0001-Life expectancy diagram

LDLE_TL-D8_0002-Life expectancy diagram



LDLM_TL-D8_0001-Lumen maintenance diagram

