



MASTER TL-D Super 80

MASTER TL-D Super 80 58W/830 1SL/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | | |
|------------------------------------|---------------------------------|--|--|--|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] | | | |
| Life to 50% Failures (Nom) | 15,000 hour(s) | | | |
| | | | | |
| Light Technical | | | | |
| Color Code | 830 [CCT of 3000K] | | | |
| Luminous Flux | 5,240 lm | | | |
| Color Designation | Warm White (WW) | | | |
| Correlated Color Temperature (Nom) | 3000 K | | | |
| Luminous Efficacy (rated) (Nom) | 90 lm/W | | | |
| Color rendering index (CRI) | >80 | | | |
| | | | | |
| Operating and Electrical | | | | |
| Power Consumption | 58.5 W | | | |
| Lamp Current (Nom) | 0.670 A | | | |
| | | | | |


| Controls and Dimming | | | | |
|-------------------------------|-------------------------------------|--|--|--|
| Dimmable | Yes | | | |
| | | | | |
| Mechanical and Housing | | | | |
| Bulb Shape | Т8 | | | |
| | | | | |
| Approval and Application | | | | |
| Mercury (Hg) Content (Nom) | 1.7 mg | | | |
| Energy Consumption kWh/1000 h | 68 kWh | | | |
| | | | | |
| Product Data | | | | |
| Order product name | MASTER TL-D Super 80 58W/830 1SL/25 | | | |
| Full product name | MASTER TL-D Super 80 58W/830 1SL/25 | | | |
| Full product code | 871829124133100 | | | |
| Order code | 927922083055 | | | |
| Material Nr. (12NC) | 927922083055 | | | |
| Numerator - Quantity Per Pack | 1 | | | |

Datasheet, 2024, January 12 data subject to change

MASTER TL-D Super 80


| EAN/UPC - Product/Case | 8718291241331 | |
|---------------------------------|---------------|--|
| Numerator - Packs per outer box | 25 | |
| EAN/UPC - Case | 8718291241348 | |

Dimensional drawing




| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|----------------------|---------|------------|------------|------------|------------|
| MASTER TL-D Super 80 | 28 mm | 1,500.0 mm | 1,507.1 mm | 1,504.7 mm | 1,514.2 mm |
| 58W/830 1SL/25 | | | | | |


Photometric data

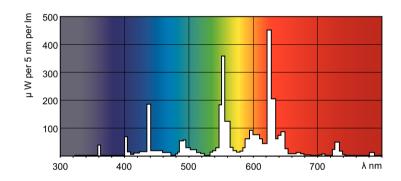

Spectral Power Distribution Colour - MASTER TL-D Super 80 58W/830 1SL/25

Lifetime

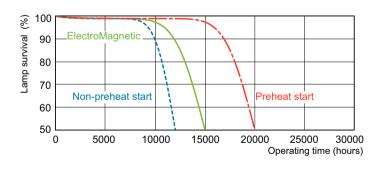




Life Expectancy Diagram - MASTER TL-D Super 80 58W/830 1SL/25

Life Expectancy Diagram - MASTER TL-D Super 80 58W/830 1SL/25

MASTER TL-D Super 80

Lifetime

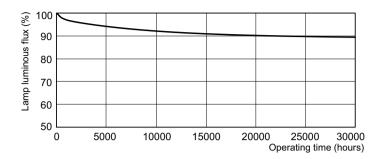

Lumen Maintenance Diagram - MASTER TL-D Super 80 58W/830 1SL/25

