



# MASTER TL-D Eco

## MASTER TL-D Eco 16W/865 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Product data

General Information	
Cap base	G13 [ Medium Bi-Pin Fluorescent]
Life to 10% failures (nom.)	12000 h
Life to 50% failures (nom.)	15000 h
Life to 50% failures preheat (nom.)	20000 h
LSF 2000 h Rated	99 %
LSF 4000 h Rated	99 %
LSF 6000 h Rated	99 %
LSF 8000 h Rated	99 %
LSF 12000 h Rated	89 %
LSF 16000 h Rated	33 %
LSF 20000 h Rated	2 %

Light Technical	
Colour code	865 [ CCT of 6,500 K]
Luminous flux (nom.)	1225 lm
Luminous flux (rated) (nom.)	1125 lm
Colour designation	Cool Daylight
Correlated colour temperature (nom.)	6500 K
Luminous efficacy (rated) (nom.)	72 lm/W
Color rendering index (nom.)	>80
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %
LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %

LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	15.7 W
Lamp current (nom.)	0.380 A

Temperature	
Design temperature (nom.)	30 °C

Controls and Dimming	
Dimmable	yes

Mechanical and Housing	
Cap base information	Green [ Green Cap]

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	2.0 mg
Energy Consumption kWh/1000 h	20 kWh

Product Data	
Full product code	871150026871640
Order product name	MASTER TL-D Eco 16W/865 SLV/25
EAN/UPC – product	8711500268716
Order code	26871640

# MASTER TL-D Eco


Local Code	16865TLDECO
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	927922886515

Net weight (piece)	71.000 g
ILCOS Code	FD-16/65/1B-E-G13-26/604

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Eco 16W/865 SLV/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604.0 mm

## TL-D Eco 16W/865

## Photometric data

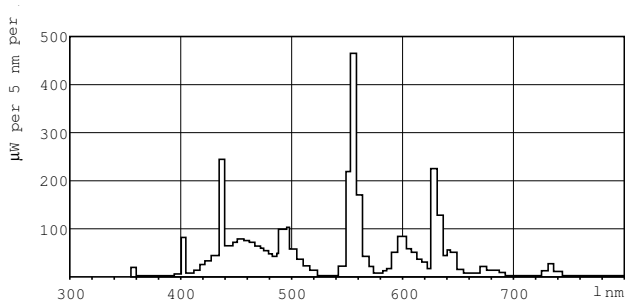

## Lightcolour /865

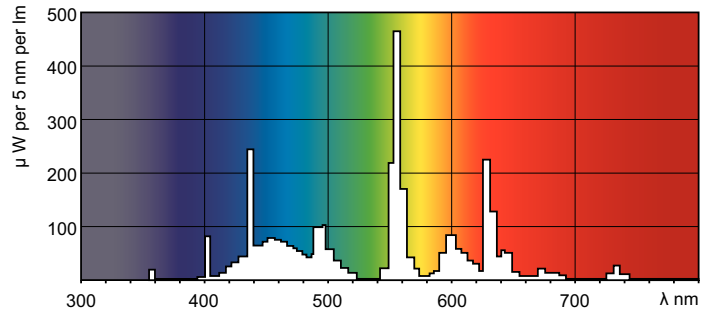

## Lightcolour /865

# MASTER TL-D Eco

## Lifetime

