

Lighting

PHILIPS

MASTER TL5 High Efficiency

MASTER TL5 HE 14W/865 SLV/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Operating and Electrical	
Cap-Base	G5	Power Consumption	14.0 W
Features	na [Not Applicable]	Lamp Current (Nom)	0.165 A
Flux measurement reference	Sphere		
		Controls and Dimming	
Light Technical		Dimmable	Yes
Color Code	865 [CCT of 6500K]		
Luminous Flux	1,125 lm	Mechanical and Housing	
Color Designation	Cool Daylight	Bulb Shape	T5
Chromaticity Coordinate X (Nom)	0.313		
Chromaticity Coordinate Y (Nom)	0.337	Approval and Application	
Correlated Color Temperature (Nom)	6500 K	Energy Efficiency Class	G
Luminous Efficacy (rated) (Nom)	80 lm/W	Mercury (Hg) Content (Nom)	1.2 mg
Color rendering index (CRI)	82	Energy Consumption kWh/1000 h	14 kWh
		EPREL Registration Number	423448

MASTER TL5 High Efficiency

Product Data			
Order product name	MASTER TL5 HE 14W/865 SLV/40		
Full product name	MASTER TL5 HE 14W/865 SLV/40		
Full product code	871150071009355		
Order code	927926086555		
Material Nr. (12NC)	927926086555		
Local order code	9279-260-86555		


Numerator - Quantity Per Pack	1	
EAN/UPC - Product/Case	8711500710093	
Numerator - Packs per outer box	40	
EAN/UPC - Case	8711500867490	

Dimensional drawing

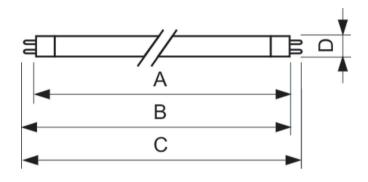


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 14W/865 SLV/40	17 mm	549.0 mm	556.1 mm	553.7 mm	563.2 mm

Photometric data

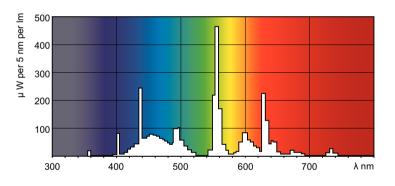


Spectral Power Distribution Colour - MASTER TL5 HE 14W/865 SLV/40

Lifetime

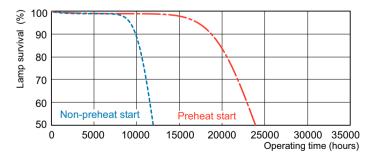

Life Expectancy Diagram - MASTER TL5 HE 14W/865 SLV/40

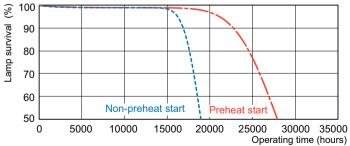


Life Expectancy Diagram - MASTER TL5 HE 14W/865 SLV/40

Datasheet, 2023, April 17

MASTER TL5 High Efficiency

Lifetime

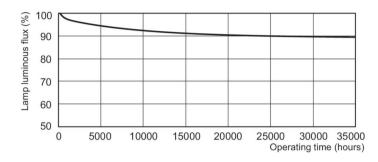

Lumen Maintenance Diagram - MASTER TL5 HE 14W/865 SLV/40



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, April 17 - data subject to change