

MASTER TL5 高效率

MASTER TL5 HE 28W/840 SLV/40

直径 16 毫米的荧光灯

安全提示

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

产品数据

一般信息	
底盖	G5 [G5]
功能	na [Not Applicable]
光通量测量参考	Sphere
灯技术	
颜色代码	840 [CCT of 4000K]
光通量	2,675 lm
颜色名称	冷白色 (CW)
色度坐标 X (标称)	0.38
色度坐标 Y (标称)	0.38
相关色温 (标称)	4000 K
光效 (额定) (标称)	96 lm/W
显色指数 (CRI)	80
操作和电气	
功耗	28.1 W
灯具电流 (标称)	0.170 A


控制和调光	
可调光	是
机械和外壳	
灯泡外形	T5 [16 毫米 (T5)]
审批和申请	
能效等级	F
汞 (Hg) 含量 (标称)	1.2 mg
能耗 kWh/1000 h	29 kWh
EPREL 注册号	423537
产品数据	
订单产品名称	MASTER TL5 HE 28W/840 SLV/40
完整的产品名称	MASTER TL5 HE 28W/840 SLV/40
完整产品代码	871150063948655
订购代码	927926584055
材料编号 (12NC)	927926584055
计算器 - 每包数量	1
EAN/UPC - 产品/箱	8711500639486
计算器 - 每个外包装箱中的包数	40

MASTER TL5 高效率

EAN/UPC - 案例


8711500867605

二维绘图

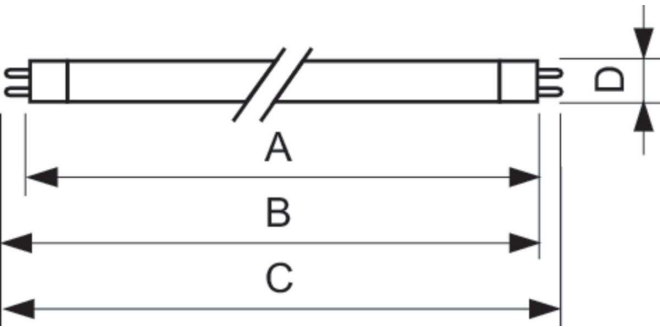


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 28W/840 SLV/40	17 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm

光度数据

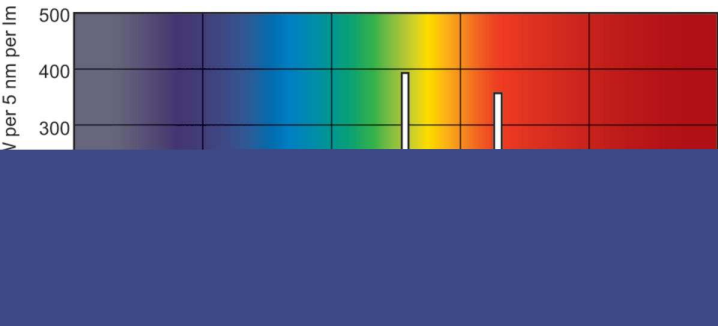


Spectral Power Distribution Colour - MASTER TL5 HE 28W/840 SLV/40

寿命

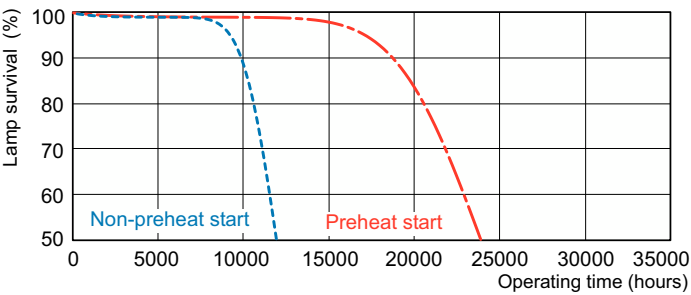

Life Expectancy Diagram - MASTER TL5 HE 28W/840 SLV/40

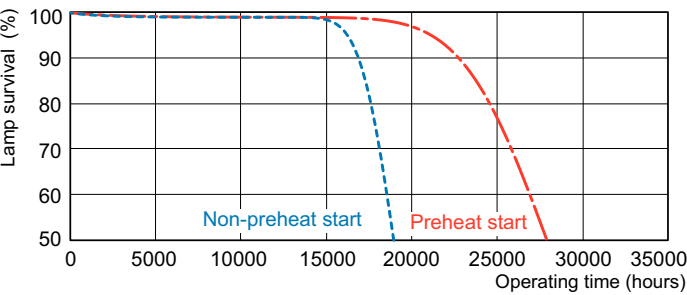

Life Expectancy Diagram - MASTER TL5 HE 28W/840 SLV/40

MASTER TL5 高效率

寿命



Lumen Maintenance Diagram - MASTER TL5 HE 28W/840 SLV/40

