General Information		Operating and Electrical	
Cap-Base	G5	Power Consumption	34.9 W
Features	na [Not Applicable]	Lamp Current (Nom)	0.175 A
Flux measurement reference	Sphere		
		Controls and Dimming	
Light Technical		Dimmable	Yes
Color Code	830 [CCT of 3000K]		
Luminous Flux	3,315 lm	Mechanical and Housing	
Color Designation	Warm White (WW)	Bulb Shape	Т5
Chromaticity Coordinate X (Nom)	0.44		
Chromaticity Coordinate Y (Nom)	0.403	Approval and Application	
Correlated Color Temperature (Nom)	3000 K	Energy Efficiency Class	F
Luminous Efficacy (rated) (Nom)	94 lm/W	Mercury (Hg) Content (Nom)	1.2 mg
Color rendering index (CRI)	82	Energy Consumption kWh/1000 h	35 kWh
		EPREL Registration Number	423540

## **MASTER TL5 High** Efficiency

### **MASTER TL5 HE 35W/830 UNP/40**

This TL5 lamp (tube diameter 16 mm) has a high luminous efficacy, resulting in low energy consumption. The High Efficiency TL5 lamp offers excellent lumen maintenance and good color rendering. Application areas are offices, industry, public and governmental buildings, schools, hospitals and indoor sports lighting.

### Warnings and Safety

· A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### **Product data**





## **PHILIPS**


# Lighting

### **MASTER TL5 High Efficiency**

Product Data	
Order product name	MASTER TL5 HE 35W/830 UNP/40
Full product name	MASTER TL5 HE 35W/830 UNP/40
Full product code	871150061103155
Order code	927927083018
Material Nr. (12NC)	927927083018


Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500611031
Numerator - Packs per outer box	40
EAN/UPC - Case	8711500634641

### **Dimensional drawing**

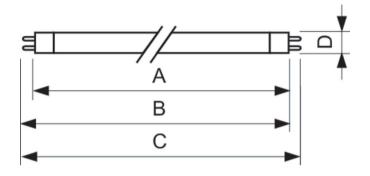


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HE 35W/830	17 mm	1,449.0 mm	1,456.1 mm	1,453.7 mm	1,463.2 mm
UNP/40					

### Photometric data

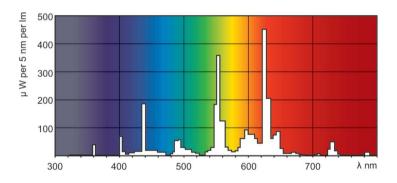


Spectral Power Distribution Colour - MASTER TL5 HE 35W/830 UNP/40

### Lifetime

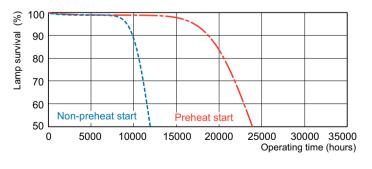




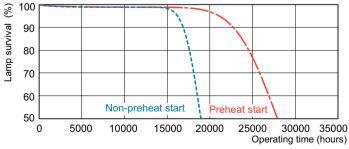

Life Expectancy Diagram - MASTER TL5 HE 35W/830 UNP/40

### **MASTER TL5 High Efficiency**

Lifetime

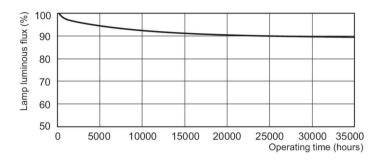

Lumen Maintenance Diagram - MASTER TL5 HE 35W/830 UNP/40



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, February 8 - data subject to change